

Solving Spatial Basic Geometric Constraint Configurations with Locus Intersection

Xiao-Shan Gao^{*}
Institute of Systems Science,
AMSS, Academia Sinica.
Beijing 100080, China
xgao@mmrc.iss.ac.cn

Christoph M. Hoffmann[†]
Department of Computer
Science, Purdue University
West Lafayette, Indiana,
47907-1398, USA
cmh@cs.purdue.edu

Wei-Qiang Yang[‡]
Institute of Systems Science,
AMSS, Academia Sinica.
Beijing 100080, China
wqyang@mmrc.iss.ac.cn.

ABSTRACT

A basic idea of geometric constraint solving is to decompose the constraint problem into smaller ones according to some basic configurations. In this paper, we find all spatial basic configurations involving points, lines, and planes containing up to six geometric primitives in an automated way. Many of these basic configurations still resist effective analytical solutions. We propose the locus intersection method for geometric constraint solving, which is used to solve all these basic configurations.

Categories and Subject Descriptors

J.6 [Computer Applications]: COMPUTER-AIDED ENGINEERING—CAD; I.3.5 [COMPUTER GRAPHICS]: Computational Geometry and Object Modeling—*Geometric algorithms, languages, and systems*; I.3.m [COMPUTER GRAPHICS]: Miscellaneous

General Terms

Geometric Constraint Solving Algorithms

Keywords

Geometric constraint solving, parametric CAD, spatial basic configuration, locus intersection

1. INTRODUCTION

^{*}Partially supported by Chinese NSF under an outstanding youth grant (NO. 69725002) and by a National Key Basic Research Project of China (NO. G1998030600).

[†]Partially supported by NSF grant CCR-99-02025 and ARO contract 39136-MA.

[‡]Partially supported by a Youth grant of Academy of Mathematics and System Sciences, Academia Sinica.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. To copy otherwise, to republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee.

SM'02, June 17-21, 2002, Saarbrücken, Germany.

Copyright 2002 ACM 1-58113-506-8/02/0006 ...\$5.00.

Geometric constraint solving (GCS) is the central topic in much of the current work of developing parametric CAD systems. It also has applications in chemical molecular modeling, linkage design, computer vision and computer aided instruction. GCS algorithms accept the declarative description of geometric diagrams or engineering drawings as the input and output a drawing procedure. There are four main approaches to GCS: the graph analysis approach [13, 14, 8, 19, 23], the rule-based approach [1, 4, 10, 20, 16, 25, 24], the numerical computation approach [21, 18], and the symbolic computation approach [5, 17]. In practice, combinations of these approaches are often used to obtain the best result. The work in [9, 11, 3, 6] uses this approach.

Since practical problems from CAD are usually very large, a basic idea in GCS is to use the following approach of *divide and conquer*.

Algorithm DC(P)

1. Divide the problem P into several sub-problems $P \Rightarrow P_1 \cup \dots \cup P_m$.
2. Solve the sub-problems $Q_i = DC(P_i)$ recursively with algorithm DC.
3. Merge the sub-problems together $Q_1 \cup \dots \cup Q_m \Rightarrow P$.

Most GCS methods may be understood in this way. For instance, in the numerical computation method, we treat each individual primitive as a sub-problem in the first step. The second step is trivial and the third step is to merge these primitives by solving a large scale equation system simultaneously. This is of course an extreme case. In general, graph algorithms are used to find feasible decompositions. The ideal decomposition is that each of the three steps in the algorithm may be solved effectively, stably and completely.

The triangle merge approaches proposed in [13, 23] may be understood as decomposing a problem into three sub-problems such that each pair of the sub-problems shares a common geometric primitive, and the merge step is to place one primitive with respect to the other two. In this approach, the *triangle problems*, i.e., the constraint problems consisting of three primitives, play an important role. They are used as building blocks for larger scale constraint problems. We may call them the *basic configurations* in these approaches. A smallest constraint problem that cannot be solved with the above method may also be considered as a basic configuration. If we can solve this basic problem, then we may use it as a building block to solve an enlarged

class of constraint problems. In [7], such a basic configuration with six primitives is solved with four-bar linkages. In [20], two rigid structures connected by three constraints are considered as basic configuration. In [14], a general method to find solvable sub-problems is proposed. The advantage of this kind of generic solvers is that once we know how to solve a basic configuration and how to decompose a large problem into sub-problems based on this basic configuration, we may create templates to solve classes of problems. Thus, highly stable and efficient solvers become possible.

In the spatial case, two kinds of basic configurations among points and planes, tetrahedra and octahedra, are identified and studied in [13, 3]. Several octahedral problems involving points and lines are also considered in [3, 15]. In this paper, we will give a systematic study of basic configurations involving points, planes, and lines.

Adding lines as new primitives increases the difficulty in finding the basic configurations and solving them completely. This may be understood in two ways. First the constraint problems with lines are more difficult to solve [15]. Second, the structures for basic configurations become more complicated and the number of basic configurations increases drastically. If considering points and planes only, the smallest non-sequential basic configurations contain six primitives [14]. If adding lines as a new primitive, we show that there exist 1, 17, and 683 basic non-sequential configurations with 4, 5, and 6 primitives — even if we treat points and planes as the same type of primitive. This makes it impossible to find all these configurations manually. An automated method is required to do the work.

Since GCS is often used in the conceptual design, it would be desirable to find all the solutions of the problem. This makes it difficult to use iteration methods such as the Newton-Raphson method. Homotopy methods are capable of finding all the solutions. But a pre-condition for efficient computation with this method is to find a reasonably small bound for the number of solutions of the system. For the octahedral configurations involving points and planes, efficient homotopy methods are developed by reducing the equation system for the configurations to a core system of three equations [3], and in [22] a system of two quartic equations is derived. But for basic configurations involving lines, the solution bounds are still too high to solve the problem efficiently with the homotopy method [15].

On the other hand, in [7] general linkages are used to solve 2D basic configurations efficiently. In this approach, loci of certain points in the linkage are generated and the constraint problems are solved by finding the intersections of these loci. This approach is also used to solve one basic octahedral configuration with lines in [15]. Similar ideas were also used in [8, 9] to solve spatial constraint problems. In this paper, this idea is extended and formalized to a general method for GCS: *locus intersection method* (LIM). The LIM is a hybrid method which combines geometric construction and heuristic search. Theoretically, it can be used to find all the solutions for geometric constraint problems. Practically, it is powerful enough to solve many difficult problems. In fact, all the 701 basic configurations, with 4, 5 and 6 primitives, can be solved with the locus intersection method.

The rest of this paper is organized as follows. In Section 2, we show how to find the basic configurations containing up to six primitives. In Section 3, we introduce the locus intersection method. In Section 4, we show how to solve the

basic configurations with the locus intersection method. In Section 5, we present our conclusions.

2. AUTOMATED GENERATION OF BASIC CONFIGURATIONS

We consider three types of *geometric primitives*: points, planes, and lines and two basic types of constraints: the angle constraints between line/line, line/plane, plane/plane and the distance constraints between point/point, point/line, point/plane and line/line. Angle and distance constraints between two primitives o_1 and o_2 are denoted by $ANG(o_1, o_2)$ and $DIS(o_1, o_2)$ respectively. If we do not need to distinguish the types of constraints, we use $CONS(o_1, o_2)$ to denote the constraint between the two primitives. Parallel and incidence constraints may be considered special cases of angle and distance constraints. Between a pair of lines, there might exist both an angle constraint and a distance constraint.

We may use a *constraint graph* to represent a constraint problem. The vertices of the graph represent the geometric primitives and the edges represent the constraints.

For a primitive o in a constraint problem, let $DOF(o)$ be the degree of freedom for o and $DEG(o)$ the number of constraints involving o . Note that each parallel constraint between line/line, line/plane, plane/plane will be counted twice, because it consumes two degrees of freedom for the corresponding primitives. For a set of geometric primitives O in a constraint problem, let $DOF(O) = \sum_{o \in O} DOF(o)$ and $DEG(O)$ the number of constraints among primitives in O .

Basic Configuration A geometric constraint problem P is called a *basic configuration* if it satisfies the following conditions.

1. It is a structurally well-constrained problem. That is, P satisfies $DOF(P) = DEG(P) - 6$. We subtract six here, because a rigid structure in 3-space has six degrees of freedom.
2. There is no geometric primitive o in the problem satisfying $DEG(o) \leq DOF(o)$. That is, no primitive in the problem can be solved by a sequential construction. Details for this case can be found in Section 3.1.
3. P cannot be decomposed into smaller basic configurations.

A basic configuration with n points, m planes, and k lines is said to be of type $nPmHkL$. Since the degree of freedom for points and planes are both three, we sometimes do not distinguish them in the structural analysis. A basic configuration with u points and planes and v lines is denoted by $uBvL$. For convenience, zero is always omitted from the above notation. For instance, $0P1H5L$ is simplified to $1H5L$.

In [13], it is pointed out that the octahedral problem in Fig. 1 is a smallest basic configuration if the geometric primitives are points and planes. There are eight non-trivial octahedral problems involving points and planes [3]. Octahedral problems $5B1L$, $4B2L$, and $3B3L$ are also considered in [3]. It is pointed out in [3] that octahedral configurations with more lines than points are always under-constraint. This is because, only angle constraints between two lines are considered. If we consider both the distance and angle constraints




Figure 1: Octahedron: a smallest basic configuration for points and planes

between two lines, there exist many more basic configurations with six geometric primitives. In the following sections, we will give all the basic constructions involving up to six geometric primitives.

2.1 Basic Configurations Involving Four Geometric Primitives

Let p be a point or a plane and o a geometric primitive. Then there exists at most one constraint between p and o . If there is a point or a plane p in the constraint problem with less than four constraints, *i.e.* $\text{DEG}(p) \leq 3$. This means that p can be constructed sequentially and the problem is not a basic configuration. Therefore, all the primitives in a basic configuration with four elements must be lines. It is not difficult to check that the only basic configuration is the tetrahedron in Fig. 2. The solution to this problem can be found in Section 4.1.

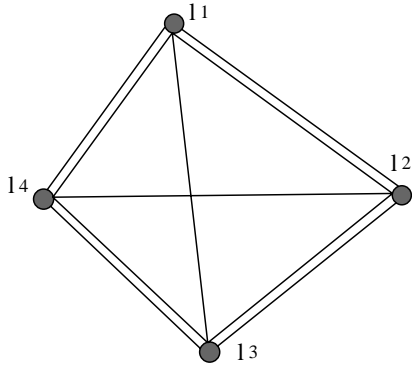


Figure 2: The basic configuration with four lines

Note that at least one of the constraints between l_1, l_3 and l_2, l_4 must be a distance constraint. Otherwise, there would be conflicts among the angle constraints. Hence, there exist two types of basic configurations involving four lines $4L_1$ and $4L_2$ which have four and five angle constraints respectively.

In Table 1, “a” means the existence of angle constraints between two lines, “d” means the existence of distance constraints between two lines, and “a/d” means the existence of both kinds of constraints.

pair of lines	l_1, l_2	l_2, l_3	l_3, l_4	l_4, l_1	l_2, l_4	l_1, l_3
Problem $4L_1$	a/d	a/d	a/d	a/d	d	d
Problem $4L_2$	a/d	a/d	a/d	a/d	d	a

Table 1: Basic configurations with four lines

2.2 Automated Generation of Basic Configurations

We use the adjacency matrix to specify the graphs of different constraint problems that have the same group of primitives.

When the number of geometric primitives increases, the number of constraint problems increases dramatically. Therefore, we need to automate the process of finding basic configurations. There are four basic steps to construct the basic configurations with a fixed number of primitives.

- S1 Construct all possible well-constrained problems.
- S2 Delete those that can be constructed sequentially with algorithm LIM0 in Section 3.1.
- S3 For those problems that have the same structure, we need only to consider one of them. Two constraint problems are said to have the same *structure* if by renaming the primitives of the same type in one of them, they become the same constraint problem.
- S4 Delete those that can be decomposed into smaller problems with the method in [14].

Steps S1 and S3 can be done in a naive manner by considering all the possible combinations. We introduce several search strategies to enhance the search efficiency. For S1, the main idea is to start from a good initial constraint problem. From the definition of basic configuration, it is easy to see that each geometric primitive in the problem must be constrained with at least four constraints. For instance, if we consider problems with six vertices, the octahedron in Fig. 1 could be used as a starting point. Although it might not cover all the conditions as we have shown in Fig. 9, which is not of the octahedron type, it does enhance the search efficiency.

For Step S3, we may use the Hamming number to reduce the number of comparisons among the adjacency matrix entries. Let $A(n, n)$ be the *adjacency matrix* for a constraint problem with n primitives. $A(i, j)$ is the number of constraints between the i -th primitive and the j -th primitive. The Hamming number for the i -th primitive is

$$H_i = \sum_{j=1}^n A(i, j).$$

Then a necessary condition for two adjacency matrix problems to be structurally the same is that the Hamming numbers for the points, planes, and lines in them must be correspondingly the same. Furthermore, if we cannot distinguish two problems by comparing their Hamming numbers, we need to consider only different combinations for those primitives with the same class and the same Hamming number. For instance, Let $\{3, 4, 4, 5\}$ be the Hamming numbers for points p_1, p_2, p_3, p_4 and q_1, q_2, q_3, q_4 in two problems respectively. Point p_1 with Hamming number 3 can only be

matched with point q_1 with the same Hamming number. We need to compare only the corresponding array from the adjacency matrix of p_1, p_2, p_3, p_4 with that from the adjacency matrix of q_1, q_2, q_3, q_4 .

2.3 Basic Configurations Involving Five and Six Geometric Primitives

Two simplifications are made in the process of finding basic configurations. First, we consider only the structure of the configurations and ignore the types of constraints between two lines. Second, we will treat points and planes as the same type of geometric primitives. This is possible since they have the same dimension of freedom. Following the method in the preceding section, we find all the basic configurations with five and six geometric primitives.

	5B	4B1L	3B2L	2B3L	1B4L	5L	Sum
N_0	0	0	1	1	3	12	17
N_1	0	0	1	1	3	12	17
N_t	0	0	1	1	3	12	17

Table 2: Basic configurations with five geometric primitives

	6B	5B1L	4B2L	3B3L	2B4L	1B5L	6L	Sum
N_0	1	1	4	12	39	132	494	683
N_1	1	1	4	12	37	122	437	614
N_2	0	0	0	0	2	10	57	69
N_t	8	9	?	?	?	?	?	?

Table 3: Basic configurations with six geometric primitives

In the above tables, N_0 is the number of basic configurations; N_1 is the number of problems that can be solved with method LIM1 (see Section 3.2 for definition); N_2 is the number of problems that can be solved with method LIM2; N_t is the number of basic configurations if we treat points and planes differently. We do not determine the number N_t in all cases so as to avoid the degenerated cases, which will be discussed later.

3. LOCUS INTERSECTION METHOD FOR GCS

Geometric and analytical solutions to a geometric constraint problem are always preferred, since such solutions are generally fast, robust, and complete. But many of the basic configurations involving lines still resist such solutions [15]. In this section, we introduce a numerical search approach of GCS, which will be used to discuss all solutions of basic configurations.

3.1 Geometric Construction Sequence

Before presenting the method, we first define the concept of construction sequences. As we mentioned before, a primitive o can be solved sequentially if it satisfies the condition $\text{DEG}(o) \leq \text{DOF}(o)$. Let o_1, \dots, o_k be the geometric primitives that have constraints with o (if o_i has two constraints with o , o_i will appear twice). Then o can be constructed from o_1, \dots, o_k by a *construction*

$$o = \text{INTER}(o_1, \dots, o_k). \quad (1)$$

For instance, let o be a point, o_1, o_2, o_3 three planes, where the distances between o and o_1, o_2, o_3 are zero. Then o is the intersection of the three planes.

In (1), if $\text{DOF}(o) = k$, the corresponding construction is called *well-defined* [13]. A well-defined construction c generally introduces a finite number of solutions, which is denoted by $\text{NUM}(c)$. If $k < \text{DOF}(o)$, the corresponding construction is called *deficient*. In this case, o generally has an infinite number of solutions. For instance, if o is a line and o_1 and o_2 are two planes imposing angle constraints on the line, then o is a line whose direction is determined by o_1 and o_2 , but can translate freely in the space.

Considering three kinds of primitives: points, planes, and lines, there are in all ten well-defined constructions for points, six well-defined constructions for planes, and twenty three well-defined constructions for lines. Of these constructions, the ones introducing points and planes are relatively easy to compute. We may divide a well-defined construction introducing a line into one of three classes: 2A2D, 1A3D, or 4D, where $nAmD$ means that the in the construction there are n angle constraints and m distance constraints, respectively. There cannot be more than two angle constraints in such a construction. Here is a description of the three constructions.

2A2D Of the three construction types for lines, this is the only one that is easy to compute. We may first determine the direction of the line from the two angle constraints, and then use the other two distance constraints to position the line. This construction generally has eight solutions.

1A3D This class has many cases since the angle constraint may be on a line or a plane and the distance constraints may be on points or lines.

4D This class also has many cases. The case of using four points to determine a line is considered in [3, 15] and has 24 solutions. Note that we consider oriented lines in this count; the number of geometric solutions is 12. The case of using four lines to determine a line has 8 solutions in the general case.

The 1A3D and 4D construction classes are too difficult to be computed dynamically. We will discuss how to treat this problem later.

A diagram can be drawn sequentially if the geometric primitives in the diagram can be listed in an order

$$o_1, o_2, \dots, o_m \quad (2)$$

such that each o_i is introduced by a construction using primitives o_1, \dots, o_{i-1} . Let C_i be the construction introducing primitive o_i . We say that the diagram can be drawn with the following *construction sequence* (abbr. CS)

$$C_1, C_2, \dots, C_m. \quad (3)$$

Suppose that all the primitives in Fig. 1 are points. If we remove constraint $\text{CONS}(p_2, p_5)$, a construction sequence is

as follows.

$$\begin{aligned}
p_1 & \text{ is a free point} \\
p_2 & = \text{INTER}(p_1) \\
p_3 & = \text{INTER}(p_1, p_2) \\
p_6 & = \text{INTER}(p_2, p_3) \\
p_4 & = \text{INTER}(p_1, p_3, p_6) \\
p_5 & = \text{INTER}(p_1, p_4, p_6).
\end{aligned} \tag{4}$$

The following algorithm to find a CS for a constraint problem is well-known (see, e.g., [6]). Since we will use it many times in this paper, we restate it here.

Algorithm LIM0.

Input: a constraint problem.

Output: a construction sequence CS with initial value \emptyset .

1. Let o be a primitive in the problem satisfying $d = \text{DEG}(o) \leq \text{DOF}(o)$.
2. Let o_1, \dots, o_d be the constructed primitives having constraints with o . Then add a construction $o = \text{INTER}(o_1, \dots, o_d)$ to CS . Terminate if no such o exists.
3. Remove o and the constraints involving o from the problem and goto Step 1.

This algorithm is linear in the number of constraints and primitives if implemented properly.

To compute a construction sequence, we need to introduce several concepts.

Since a spatial rigid body has six degrees of freedom, some primitives in the problem must be placed with respect to a coordinate system to guarantee that the problem has a finite number of solutions. If a constraint problem may be described by a CS, we may find a set of *placement primitives* as follows. Let d be the maximal number such that the first d primitives O_d in the CS form a well-constrained problem with the constraints in the CS. That is O_d satisfies $\text{DOF}(O_d) = \text{DEG}(O_d) - 6$. Then these first d primitives may be treated as a set of placement primitives. In CS (4), $PS = \{p_1, p_2, p_3\}$ is a set of placement primitives that form a rigid body.

The *driving primitives* in a CS are those primitives introduced by deficient constructions, but are not placement primitives. To evaluate the CS, we need to add new constraints depending on free parameters to the deficient constructions to change them to well-defined constraints. For instance, the construction $p_6 = \text{INTER}(p_2, p_3)$ in (4) is a deficient construction. Point p_6 is on the intersection circle of two spheres. Then, we may use the angle formed by planes $h(p_6 p_2 p_3)$ and $p_1 p_2 p_3$ as a free parameter, and p_6 can now be introduced by a well-defined construction as $p_6 = \text{INTER}(p_2, p_3, h)$. The number of solutions of this new construction is defined as the number of solutions of the deficient construction.

The *maximal number of branches* of a CS (3) with p placement primitives is defined as follows

$$\text{NUM}_{(3)} = \text{NUM}_b \prod_{i=p+1, m} \text{NUM}_{(C_i)} \tag{5}$$

where NUM_b is the number of solutions for the placement part. For CS (4), the placement part is a triangle and hence $\text{NUM}_b = 1$. The number of solution branches for the remaining three constructions are two. Then $\text{NUM}_{(4)} y = 8$.

If all the constructions are well-defined, then the evaluation for the CS is straightforward, and the corresponding constraint problem has at most $\text{NUM}_{(c)}$ solutions. Otherwise, the problem generally has an infinite number of solutions.

3.2 The Locus Intersection Method

The *locus intersection method* (abbr. LIM) for GCS has the following basic steps. We will use the octahedral problem in Fig. 1 as a working example. Suppose that all the primitives in this problem are points.

Algorithm LIMd. In the algorithm, the input is a well-constrained problem. The output is to find all the solutions of the problem. Here d is the number of constraints to be removed from the original problem.

1. **Find A Sequential Solution.** Try to solve the problem with algorithm LIM0. If it cannot be solved, goto the next step.
2. **Remove Constraints and Determine Construction Sequence.** Let $d > 0$ be the smallest number such that when we remove d constraints from the problem the remaining problem can be solved with Algorithm LIM0. The geometric primitives in the removed constraints are called *locus primitives*. For the problem in Fig. 1, if we remove the constraint between p_2 and p_5 , algorithm LIM0 generates construction sequence (4).
3. **Find Placement Primitives.** We use the CS obtained in the preceding step to find the placement primitives. As mentioned in the preceding section, placement elements for CS (4) are p_1, p_2, p_3 .
4. **Find Driving Primitives.** Since d constraints are removed from the well-constrained problem, there must be some deficient constructions in CS. In CS (4), the driving primitive is p_6 .
5. **Generate Loci.** We allow the driving primitives to move with small steps, which will be explained below. For each position of the driving primitives, we may compute the coordinates of all primitives in the problem according to the construction sequence. Repeat the above process, we generate a set of coordinates for each locus primitive. The set thus generated is called the *locus for the locus primitive*. So the locus here is discrete. The continuous curve in Fig. 3 is obtained by connecting two consecutive points with a line segment. How to select the moving steps for the driving primitive is a subtle matter. The smaller the steps, the better the chance we find all the solutions. But, a very small step will lead to a large number of samples and will decrease the computation speed. We use the following heuristic to select a suitable set of values for the driving parameters. First, fixed and uniform steps for the driving parameters are selected and used to generate the loci. For instance, if the range for an angle parameter is from 0 to π , we would select $\pi/300$ as the initial step. Second, if for two consecutive values t_1, t_2 of the driving parameter, the distances between the positions of any locus primitive are larger than a small number, say 0.01, we will add more samples between t_1 and t_2 .

In this step, we need to decide how to move the driving points. A general method is as followed. Suppose that $o = \text{INTER}(o_1, \dots, o_m)$ is a driving point with s deficient degrees of freedom. Then we may select s primitives b_1, \dots, b_s , which have been constructed before o , and compute o using the following construction $o = \text{INTER}(o_1, \dots, o_m, b_1, \dots, b_s)$. The constraints between o and b_i are called *driving constraints* or *driving parameters*.

We also need to determine the range from which the driving parameters take values. If the constraint between o and b_i is an angle constraint, then we may take the range for the parameter as $0 \sim \pi$ and $0 \sim 2\pi$ depending on whether o is a point or a line (or plane). If the constraint between o and b_i is a distance constraint, we may use the following result to determine an upper bound for the distance from o to b_i .

Let P be a point and o_1, o_2 any primitives. Then $\text{DIS}(o_1, o_2) \leq \text{DIS}(o_1, P) + \text{DIS}(P, o_2)$.

The proof for this result is omitted. In the general case, we do not obtain an explicit formula for the upper bound.

Note that the lower and upper bounds mentioned above are generally not optimal (see Figures 4 and 5). A more detailed analysis could reveal narrower enclosures for feasibility ranges. For example, [12] derives tight range estimates for valid parameter ranges in 2D GCS based on geometric reasoning.

In (4), we use the angle between plane $p_6p_2p_3$ and plane $p_1p_2p_3$ as the driving parameter. This parameter may change from 0 to π , but we consider only values from 0 to $\pi/2$ by symmetry.

- Locus Intersection.** After the loci for locus primitives are generated, we check them to find whether the removed constraints are satisfied. To be more precise, let DS be the set of values for the driving parameters, LS the set of locus primitives, and PS the set of all primitives. For each value t in DS , we may compute the coordinates $LS(t)$ and $PS(t)$ for the primitives in LS and PS . We search the set $LS(t)$ to find the set T of values t_0 such that $LS(t_0)$ satisfies the removed constraints approximately. For instance, let the removed constraint be $\text{DIS}(o_1, o_2)$. For each value t in DS , compute $d(t) = |\text{DIS}(o_1, o_2) - |o_1(t)o_2(t)||$. A value t_0 is a solution if the following conditions are satisfied: $d(t_0)$ is a local minimum and $d(t_0)$ is a small number. Then the solutions of the GCS problem are $\{PS(t) | t \in T\}$. This step may be considered to find the intersections of several loci.

Fig. 3 is the distance curve for the 6p problem with a set of constraint values given in Table 4. From this figure we may give a classification of number of solutions for the problem (in Table 5) according to distance p_2p_5 .

For the problem given in Table 4, $|p_2p_5| = 1.3$. There exist 12 solutions. All of them are realizable in Euclidean space.

$d_{12} = 1.000$	$d_{13} = 1.108$	$d_{23} = 1.073$	$d_{14} = 1.181$
$d_{15} = 1.275$	$d_{26} = 1.171$	$d_{34} = 1.157$	$d_{45} = 1.164$
$d_{46} = 1.067$	$d_{56} = 1.110$	$d_{36} = 1.052$	$d_{25} = 1.3$

Table 4: A set of constraint values for the 6p problem

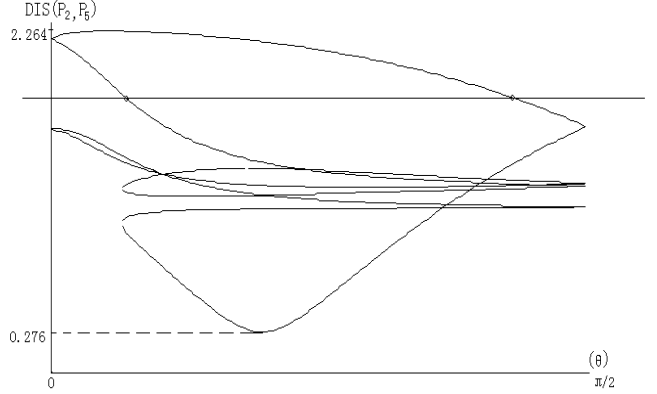


Figure 3: The distance curves for p_2p_5 in the Octahedral problem for points. The x-axis is the driving parameter for point p_6 . The y-axis is $\text{DIS}(p_2, p_5)$. The average time to compute the curves is 0.07 second on a PC with PIII733 and 128M memory. We select 157 samples for the driving primitive. Sixteen curve segments are computed, which contain 2512 points. In the figure, two consecutive points are connected with a line segment.

Let d be the number of positions for each driving primitive. Then the driving parameters take values in a d -dimensional space. Note that number d is a critical parameter influencing the amount of computation required by the above method. Because of this, we call the above method the *locus intersection method of dimension d* (abbr. LIM d).

Another important parameter in the above method is the number of branches of the construction sequence which represents the number of loci need to be computed. This bound is generally much smaller than the Bezout number (see, e.g., [3]) of the problem. For instance, the naive Bezout number for the Octahedron problem in Fig. 1 is 4096. In [3], a system of polynomial equations with total degree 64 and BKK bound 16 is obtained after simplification. The number of loci need to be computed in our case is 8. Note, however, that the loci here are different from the paths used in the homotopy method. One locus here may give rise to multiple solutions of the problem, and therefore the number of loci is not equal to the number of solutions.

4. SOLVING THE BASIC CONFIGURATIONS

We have used the LIM method in Section 3.2 to solve all basic configurations obtained in Section 2.2. The two tetrahedral problems for lines can be solved with algorithm LIM1. The results for the basic configurations with five and six primitives are given in Tables 2 and 3. It is readily seen that *all the basic configurations up to six vertices for points,*

Values for $ P_2P_5 $	0.275- -1.171	1.171- -1.228	1.228- -1.353	1.353- -1.615	1.615 - -2.263
Number of solutions	4	8	12	8	4

Table 5: Number of solutions of the Octahedron problem for different values of p_2p_5

planes, and lines can be solved with method LIM1 and LIM2. Below, we will give some of the details of the solutions.

4.1 Basic Configurations with Four Lines

We first consider the basic configurations with four lines (Fig. 2). If we remove the constraint between l_1 and l_3 , a construction sequence is as follows.

$$\begin{aligned}
l_1 & \text{ is a free line} \\
l_2 & = \text{INTER}(l_1, l_1) \\
l_4 & = \text{INTER}(l_1, l_1, l_2) \\
l_3 & = \text{INTER}(l_2, l_2, l_4, l_4).
\end{aligned} \tag{6}$$

The placement primitives are lines l_1 and l_2 . The driving primitive is l_4 which has an angle and distance constraint with l_1 . Since one of the constraints $\text{CONS}(l_1, l_3)$ and $\text{CONS}(l_2, l_4)$ is a distance constraint, we may always assume that the constraint $\text{CONS}(l_2, l_4)$ is a distance constraint and add an angle constraint between l_2 and l_4 as the driving constraint.

Fig. 4 and Fig. 5 give the solution curves for problems $4L_1$ and $4L_2$ with concrete constraints values given in Tables 6 and 7.

$d_{12}=0.00000$	$a_{12}=0.78540$	$d_{23} = \sqrt{2}$	$d_{24} = 1.5$
d_{13} removed	$d_{14}=1.00000$	$a_{14} = \pi/2$	$d_{34}=2$
$a_{34} = \pi/3$	$a_{23} = \pi/4$		

Table 6: the set of constraints for $4L_1$

$d_{12}=0.00000$	$a_{12}=0.78540$	$d_{23} = \sqrt{2}$	$d_{24} = 1.5$
a_{13} removed	$d_{14}=1.00000$	$a_{14} = \pi/2$	$d_{34}=2$
$a_{34} = \pi/3$	$a_{23} = \pi/4$		

Table 7: the set of constraints for $4L_2$

Note that the Bezout numbers for problems $4L_1$ and $4L_2$ are 4194304 and 2097152. The maximal number of branches (see (5) for the definition) for 6 is 64 in both cases. Therefore, the number of loci generated by the LIM1 method is 64. The two figures look different, because the curve in Fig. 5 is the overlap of many curve segments. For the given values of constraints, we may obtain the following results from the method.

1. Problem $4L_1$ has solutions for $0.787 < \text{ANG}(l_1, l_3) < 1.823$. Problem $4L_2$ has solutions for $0.787 < \text{ANG}(l_1, l_3) < 1.823$ and $0.524 < \text{ANG}(l_4, l_2) < 1.571$. Note that the curves in Fig. 4 and Fig. 5 are multiple curves, i.e., several curves are coincident.

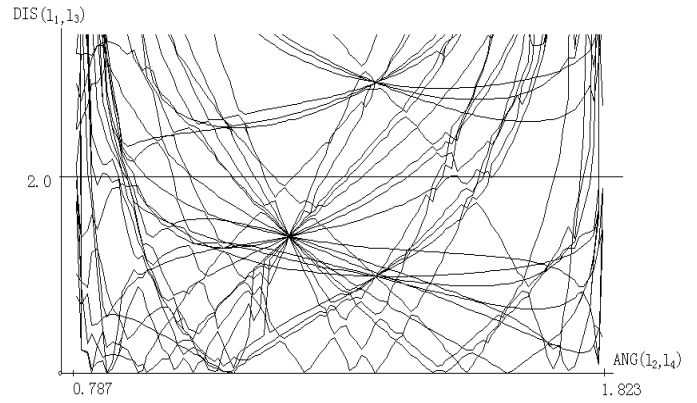


Figure 4: Solutions to configuration $4L_1$. The x-axis is $\text{ANG}(l_2, l_4)$. The y-axis is the $\text{DIS}(l_1, l_3)$. The average time to compute the 64 curves is 0.23 second on a PC with PIII733 and 128M memory. We select 314 samples for the driving primitive. 64 curve segments are computed, which contain approximately 6656 points.

2. Problem $4L_2$ has 64 solutions on the solid part of the solution curve. Problem $4L_1$ has at most 134 solutions for different values $\text{DIS}(l_1, l_3)$. Fig. 4 shows the case for $\text{DIS}(l_1, l_3) = 2.0$, which has 98 solutions.

4.2 Basic Configurations with Five Primitives

In all, there are 17 basic configurations involving five primitives if we treat points and planes as the same type. All of these problems can be solved with method LIM1. We use a 5L configuration in Fig. 6 as an illustrative example, where $\text{CONS}(l_1, l_3)$, $\text{CONS}(l_1, l_4)$, and $\text{CONS}(l_2, l_4)$ are distance constraints and $\text{CONS}(l_2, l_5)$ is an angle constraint.

For the 5L configuration in above figure, each of the fourteen constraints in the configuration can be removed and we may obtain fourteen CSs for the problem. Among these CSs, the following two are essentially different. All other CSs are similar to one of them.

If we remove $\text{CONS}(l_1, l_3)$, a construction sequence is as followed

$$\begin{aligned}
l_1 & \text{ is a free line} \\
l_5 & = \text{INTER}(l_1, l_1) \\
l_4 & = \text{INTER}(l_1, l_5, l_5) \\
l_2 & = \text{INTER}(l_1, l_1, l_4, l_5) \\
l_3 & = \text{INTER}(l_2, l_2, l_4, l_4)
\end{aligned} \tag{7}$$

The placement primitives are l_1, l_5 . The driving primitive is l_4 . The maximal number of branches is 512.

If we remove $\text{CONS}(l_2, l_5)$, a construction sequence is as followed

$$\begin{aligned}
l_1 & \text{ is a free line} \\
l_2 & = \text{INTER}(l_1, l_1) \\
l_3 & = \text{INTER}(l_1, l_2, l_2) \\
l_4 & = \text{INTER}(l_1, l_2, l_3, l_3) \\
l_5 & = \text{INTER}(l_1, l_1, l_4, l_4)
\end{aligned} \tag{8}$$

The placement primitives are l_1, l_2 . The driving primitive is l_3 .

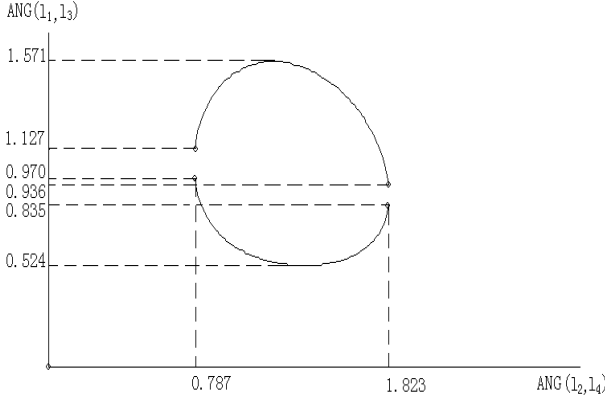


Figure 5: Solutions to configuration $4L_2$. The x-axis is $ANG(l_2, l_4)$. The y-axis is the $ANG(l_1, l_3)$. The average time to compute the 64 curves is 0.23 second on a PC with PIII733 and 128M memory. The curves contain approximately 6656 points.




Figure 6: One 5L basic configuration

In step 2 of algorithm LIMd, we may remove different constraints. Therefore, the process of obtaining a construction sequence is not unique, and we could obtain many different construction sequences for the same problem. An advantage of generating multiple CSs is that we may select a “good” one. For instance CS (7) is better than (8). This is because, all the construction steps in (7) determine a line using two angle and two distance constraints. This kind of construction is easy to evaluate. In (8) we construct l_4 using one angle and three distance constraints. This kind of construction is difficult to evaluate. Therefore, we will choose CS (7) to compute the problem. A general heuristic to select a good CS is to have the smallest number of lines as the non-placement elements, and in constructions for lines to use 2A2D type construction.

4.3 Basic Configurations with Six Primitives

From Table 3, there are in all 683 basic configurations involving six primitives if we treat points and planes as the same type. Of these problems, 614 can be solved with method LIM1 and 69 have to be solved with method LIM2. We take the 2P4L configuration in Fig. 7 as an illustrative example. To solve this problem, we need algorithm LIM2. The following construction is such that all steps are easy to evaluate. The Construction Sequence is as follows:

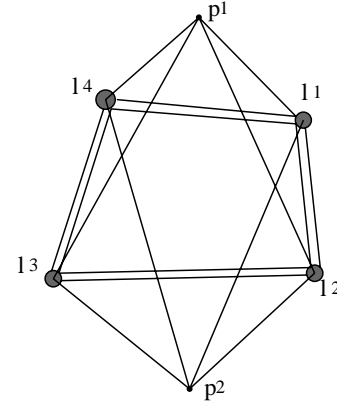


Figure 7: One 2P4L basic configuration

$$\begin{aligned}
 l_1 & \text{ is a free line} \\
 l_2 & = \text{INTER}(l_1, l_1) \\
 l_3 & = \text{INTER}(l_2, l_2) \\
 l_4 & = \text{INTER}(l_1, l_1, l_3, l_3) \\
 p_1 & = \text{INTER}(l_2, l_3, l_4) \\
 p_2 & = \text{INTER}(l_2, l_3, l_4)
 \end{aligned} \tag{9}$$

The removed constraints are $CONS(p_1, l_1)$ and $CONS(p_2, l_1)$. The placement primitives are l_1, l_2 . The driving primitive is l_3 . The maximal number of branches is 4096.

Note that besides the constraints with l_2 , the line l_3 still has two degrees of freedom. According to the algorithm LIM2, we need to add two more driving constraints to construct l_3 . The new construction for l_3 is

$$l_3 = \text{INTER}(l_2, l_2, l_1, l_1)$$

and the driving parameters are the angles and distances between l_3 and l_1 . An upper bound for the $DIS(l_3, l_1)$ is $DIS(p_1, l_1) + DIS(p_1, l_3)$ by the fact mentioned in Step 5 of Algorithm LIMd.

Since there are two driving parameters, the loci for P_1 and P_2 are surfaces, and we need to search two surfaces in the loci intersection step. We may use the following trick to reduce the amount of computation and searches. After the computation of point P_1 , we will check whether constraint $CONS(P_1, l_1)$ is satisfied, and only use those P_1 satisfying this constraint to compute P_2 .




Figure 8: One 6L basic configuration

We consider the 6L configuration in Fig. 8 where $CONS(l_1,$

l_4), $\text{CONS}(l_1, l_5)$, $\text{CONS}(l_2, l_6)$, $\text{CONS}(l_3, l_4)$, $\text{CONS}(l_3, l_6)$ are distance constraints and $\text{CONS}(l_2, l_5)$ is an angle constraint. This problem can be solved with LIM2. If we remove $\text{CONS}(l_6, l_2)$ and $\text{CONS}(l_6, l_3)$, a construction sequence is as follows.

$$\begin{aligned}
& l_1 \text{ is a free line} \\
& l_2 = \text{INTER}(l_1, l_1) \\
& l_3 = \text{INTER}(l_1, l_1, l_2, l_2) \\
& l_4 = \text{INTER}(l_1, l_3) \\
& l_5 = \text{INTER}(l_1, l_2, l_4, l_4) \\
& l_6 = \text{INTER}(l_4, l_4, l_5, l_5)
\end{aligned} \tag{10}$$

The placement primitives are l_1, l_2, l_3 . The driving primitive is l_4 . The maximal number of branches is 2048.

This problem differs from all other examples in that the primitive elements are non-trivial. We need to estimate the number of solutions for the placement part, while the placement part for all the previous examples has only one solution.

To compute the placement part, we may use l_1, l_2 as a new placement and compute l_3 . In this way, we may find eight solutions. But in these solutions, only four are different geometrically. This is because, when rotating l_1, l_2, l_3 around the common perpendicular line of l_1 and l_2 by π , one solution will change into another solution. Therefore, the placement part has four solutions. This example shows that to use a large placement part may reduce the total number of branches needed to be computed.

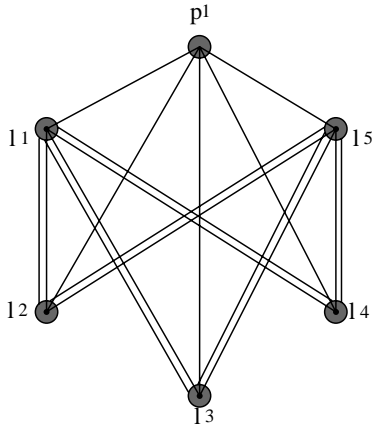


Figure 9: A 1P5L configuration does not have an octahedron structure

All the configurations encountered so far have the octahedron structure. The 1P5L configuration in Fig. 9, however, is not an octahedron. This problem could be solved with the LIM2 method.

4.4 Dynamic Locus Intersection Method

A precondition that the LIM d method works is that constructions can be evaluated efficiently. This is always the case in basic 2D GCS, since we need to solve only two equations of degree less than or equal to two [7]. As we mentioned before, some of the constructions for spatial lines are difficult to compute. We introduce the *dynamic LIM d* method to solve this problem.

Let us consider the construction for line

$$l = \text{INTER}(l_1, l_2, l_3, l_4)$$

which is of class 1A3D. Suppose that $\text{CONS}(l, l_1)$ is an angle constraint. To compute this construction we introduce a new construction

$$l = \text{INTER}(l_1, l_2, l_2, l_3)$$

where the angle constraint between l and l_2 is used as a free parameter. In other words, we change the construction from a well-defined one to a deficient one that is easy to compute by removing another constraint $\text{DIS}(l, l_4)$. The removed constraint needs to be checked later in the intersection step. If the original problem involving this construction may be solved with an LIM d method, then we will use an LIM $d+1$ method to solve it.

For instance, if the constraints $\text{CONS}(l_1, l_3)$, $\text{CONS}(l_1, l_4)$, $\text{CONS}(l_2, l_4)$, $\text{CONS}(l_2, l_5)$ in the 5L problem in Fig. 6 are all distance constraints, then we need a 1A3D construction in any construction sequence. So, if we remove $\text{DIS}(l_1, l_3)$ and $\text{DIS}(l_2, l_5)$, a construction sequence is as follows.

$$\begin{aligned}
& l_1 \text{ is a free line} \\
& l_5 = \text{INTER}(l_1, l_1) \\
& l_4 = \text{INTER}(l_1, l_5, l_5) \\
& l_2 = \text{INTER}(l_1, l_1, l_4) \\
& l_3 = \text{INTER}(l_2, l_2, l_4, l_4)
\end{aligned} \tag{11}$$

The placement primitives are l_1, l_5 . The driving primitives are l_4 and l_2 . We use the angle constraints $\text{ANG}(l_4, l_1)$ and $\text{ANG}(l_4, l_2)$ as the driving parameters. In terms of efficiency, this is a trade off: we use an LIM2 method to solve a problem that can be solved with an LIM1 method to avoid the computation of a 1A3D construction.

We may treat a construction of type 4D for a line similarly. In this case, we need to remove two constraints and to introduce two driving angle constraints. If the original problem involving this construction may be solved with an LIM d method, then this change would let us solve the problem using an LIM $d+2$ method.

5. CONCLUSION

One of the main difficulties of GCS lies in the fact we need methods that deliver efficient and complete solutions to the constraint problem. A basic idea of GCS is to decompose the constraint problem into smaller ones according to some basic configuration. In this paper, we identify all basic spatial configurations containing up to six geometric primitives and propose the locus intersection method to find all the solutions of these basic configurations.

This paper further reveals the nature of difficulties of GCS. Even for constraint problems with up to six primitives, there exist hundreds of essentially different basic configurations and most of them are quite difficult to solve. This is basically due to the presence of lines. If only points and planes are considered, then there is only one basic structure: the octahedron as shown in [3]. This suggests that we need to find a way to avoid using lines in spatial GCS in the same way as points and planes. Also, some of the basic line configurations may have special cases in which the algebraic equations must be solved with specialized techniques.

It is interesting to note that application considerations also motivate limiting the role of lines in spatial constraint

systems. Namely, in the definition of spatial constraint problems in parametric engineering design, there is an underlying mechanism to select a solution based on the orientations of the elements, in relation to each other. When editing such a design, assigning new dimensional constraint values to some of the distances or angles, it is possible that the solution so identified is not correct, [2]. Such problems can be avoided in many cases when limiting the role of lines in the constraint structure.

For some of the basic configurations, analytical solutions are also possible. For instance, in the basic configurations with four lines and five angle constraints, we may determine the directions of the four lines by these angle constraints. This simplifies the problem significantly.

6. REFERENCES

- [1] B. Brüderlin, Using Geometric Rewriting Rules for Solving Geometric Problems Symbolically, *Theoretical Computer Science*, **116**, 291-303, 1993.
- [2] X. Chen and C. Hoffmann, On Editability of Feature Based Design, *CAD 27*, 905-914, 1995.
- [3] C. Durand and C.M. Hoffmann, A Systematic Framework for Solving Geometric Constraints Analytically, *J. of Symbolic Computation*, **30**(5), 493-529, 2000.
- [4] X.-S. Gao and S. C. Chou, Solving Geometric Constraint Systems I. A Global Propagation Approach, *Computer Aided Design*, **30**(1), 47-54, 1998.
- [5] X.-S. Gao and S. C. Chou, Solving Geometric Constraint Systems II. A Symbolic Approach and Decision of Rc-constructibility, *Computer-Aided Design*, **30**(2), 115-122, 1998.
- [6] X.-S. Gao, L. Huang, and K. Jiang, A Hybrid Method for Solving Geometric Constraint Problems in *Automated Deduction in Geometry*, J. Richter-Gebert and D. Wang (eds), 16-25, LNAI No. **2061**, Springer-Verlag, Berlin, 2001.
- [7] X.-S. Gao, K. Jiang, and C.-C. Zhu, Geometric Constraint Solving with Conics and Linkages, accepted by *Computer Aided Design*.
- [8] C. Hsu, *Graph-Based Approach for Solving Geometric Constraint Problems*, PhD Thesis, The University of Utah, 1996.
- [9] C. Hsu and B. Brüderlin, A Hybrid Constraint Solver Using Exact and Iterative Geometric Constructions, in *CAD Systems Development – Tools and Methods*, D. Roller, P. Brunet, eds., Springer Verlag, 1997.
- [10] R. Joan-Arinyo and A. Soto, A Correct Rule-Based Geometric Constraint Solver, *Computers and Graphics*, **21**(5), 599-609, 1997.
- [11] R. Joan-Arinyo and A. Soto, Combining Constructive and Equational Geometric Constraint-Solving Techniques, *ACM Trac. on Graphics*, **18**(1), 35-55, 1999.
- [12] R. Joan-Arinyo, N. Mata, and A. Soto, A Constraint-Solving Based Approach to Analyze 2D Geometric Problems, *Proc. Solid Modeling '01*, Ann Arbor, MI, 2001, 11-17.
- [13] C. Hoffmann and P.J. Vermeer, Geometric Constraint Solving in R^2 and R^3 , in *Computing in Euclidean Geometry*, D.Z.Du and F.Huang (eds), pp. 266-298, World Scientific, Singapore, 1995.
- [14] C. M. Hoffmann, A. Lomonosov and M. Sitharam, Finding Solvable Subsets of Constraint Graphs, in *LNCS*, NO.1330, pp.163-197, Springer, Berlin Heidelberg, 1997.
- [15] C. M. Hoffmann and B. Yuan, On Spatial Constraint Solving Approaches, to appear in *Proc. of ADG'2000*, J. Richter-Gebert and D. Wang (eds), Zurich, Switzerland, September, Springer, Berlin Heidelberg, 2001.
- [16] G. A. Kramer, *Solving Geometric Constraints Systems: A Case Study in Kinematics*, MIT Press, Cambridge Massachusetts, 1992.
- [17] K. Kondo, Algebraic Method for Manipulation of Dimensional Relationships in Geometric Models, *Computer Aided Design*, **24**(3), 141-147, 1992.
- [18] H. Lamure and D. Michelucci, Solving Geometric Constraints By Homotopy, *IEEE Trans on Visualization and Computer Graphics*, **2**(1):28-34, 1996.
- [19] R. S. Latham and A. E. Middleditch, Connectivity Analysis: a Tool for Processing Geometric Constraints, *Computer Aided Design*, **28**(11), 917-928, 1994.
- [20] J. Y. Lee and K. Kim, Geometric Reasoning for Knowledge-Based Design Using Graph Representation, *Computer-Aided Design*, **28**(10), 831-841, 1998.
- [21] V. C. Lin, D. C. Gossard and R. A. Light, Variational Geometry in Computer-Aided Design, *Computer Graphics*, **15**(3), 171-177, 1981.
- [22] D. Michelucci, Using Cayley-Menger Determinants, undated world-wide-web document, www.emse.fr/~micheluc/MENGER/.
- [23] J. Owen, Algebraic Solution for Geometry from Dimensional Constraints, in *ACM Symp., Found of Solid Modeling*, ACM Press, New York, 1991, pp. 397-407.
- [24] G. Sunde, Specification of Shape by Dimension and Other Geometric Constraints, *Geometric Modeling for CAD Application*, pp.199-213, North-Holland, 1998.
- [25] A. Verroust, F. Schonek and D. Roller, Rule-Oriented Method for Parameterized Computer-Aided Design, *Computer Aided Design*, **24**(10), 531-540, 1992.
- [26] W. T. Wu, *Basic Principles of Mechanical Theorem Proving in Geometries*, Science Press, Beijing, 1984; English Version, Springer-Verlag, Berlin Heidelberg, 1994.