



Chapter 2: Entity-Relationship Model


- Entity Sets
- Relationship Sets
- Design Issues
- Mapping Constraints
- Keys
- E-R Diagram
- Extended E-R Features
- Design of an E-R Database Schema
- Reduction of an E-R Schema to Tables





Entity Sets

- A *database* can be modeled as:
 - ★ a collection of entities,
 - ★ relationship among entities.
- An *entity* is an object that exists and is distinguishable from other objects.
 - ★ Example: specific person, company, event, plant
- Entities have *attributes*
 - ★ Example: people have *names* and *addresses*
- An *entity set* is a set of entities of the same type that share the same properties.
 - ★ Example: set of all persons, companies, trees, holidays

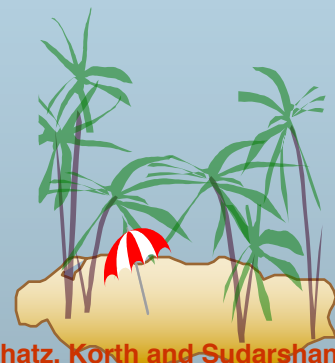



Entity Sets *customer* and *loan*

customer-id customer- customer- customer-
 name street city

loan- amount
number

321-12-3123	Jones	Main	Harrison
019-28-3746	Smith	North	Rye
677-89-9011	Hayes	Main	Harrison
555-55-5555	Jackson	Dupont	Woodside
244-66-8800	Curry	North	Rye
963-96-3963	Williams	Nassau	Princeton
335-57-7991	Adams	Spring	Pittsfield

customer

L-17	1000
L-23	2000
L-15	1500
L-14	1500
L-19	500
L-11	900
L-16	1300

loan






Attributes

- An entity is represented by a set of attributes, that is descriptive properties possessed by all members of an entity set.

Example:

*customer = (customer-id, customer-name,
customer-street, customer-city)*
loan = (loan-number, amount)

- **Domain** – the set of permitted values for each attribute
- Attribute types:
 - ★ *Simple and composite* attributes.
 - ★ *Single-valued and multi-valued* attributes
 - ✓ E.g. multivalued attribute: *phone-numbers*
 - ★ *Derived* attributes
 - ✓ Can be computed from other attributes
 - ✓ E.g. *age*, given date of birth

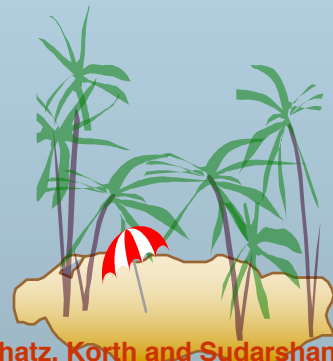



Composite Attributes

Composite
Attributes

name

first-name *middle-initial* *last-name*

Component
Attributes

address

street *city* *state* *postal-code*

street-number *street-name* *apartment-number*





Relationship Sets

- A **relationship** is an association among several entities

Example:

<u>Hayes</u>	<u>depositor</u>	<u>A-102</u>
<i>customer</i> entity	relationship set	<i>account</i> entity


- A **relationship set** is a mathematical relation among $n \geq 2$ entities, each taken from entity sets

$$\{(e_1, e_2, \dots, e_n) \mid e_1 \in E_1, e_2 \in E_2, \dots, e_n \in E_n\}$$

where (e_1, e_2, \dots, e_n) is a relationship



★ Example:

$$(\text{Hayes}, \text{A-102}) \in \text{depositor}$$

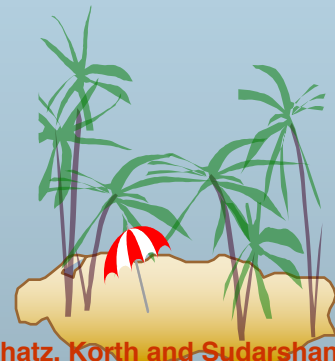





Relationship Set *borrower*

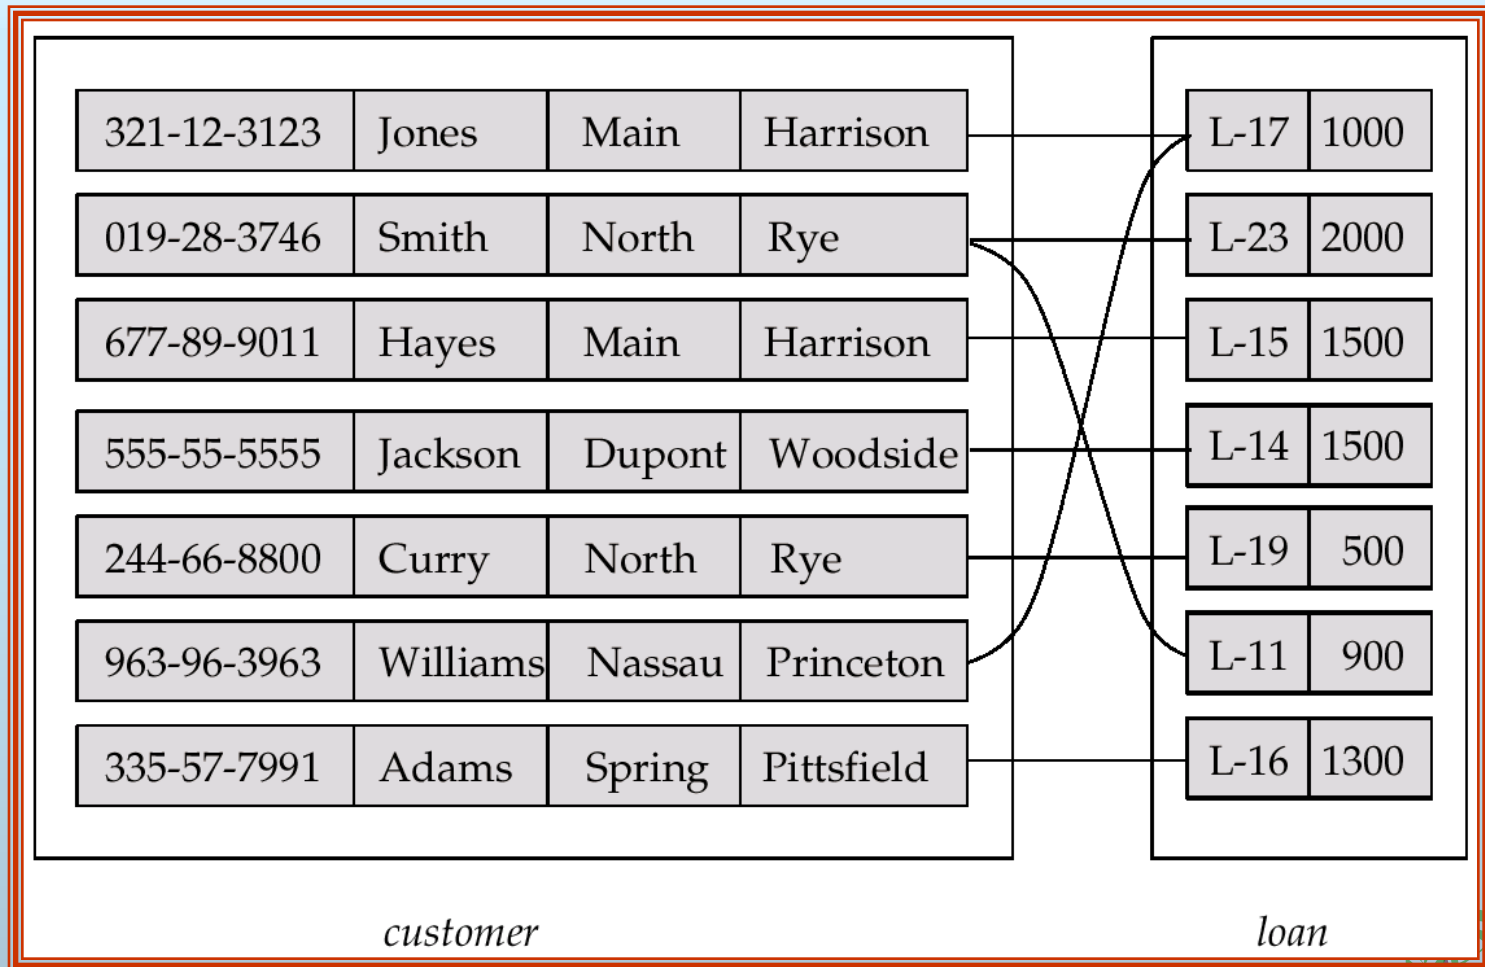



Relationship Sets (Cont.)


- An *attribute* can also be property of a relationship set.
- For instance, the *depositor* relationship set between entity sets *customer* and *account* may have the attribute *access-date*

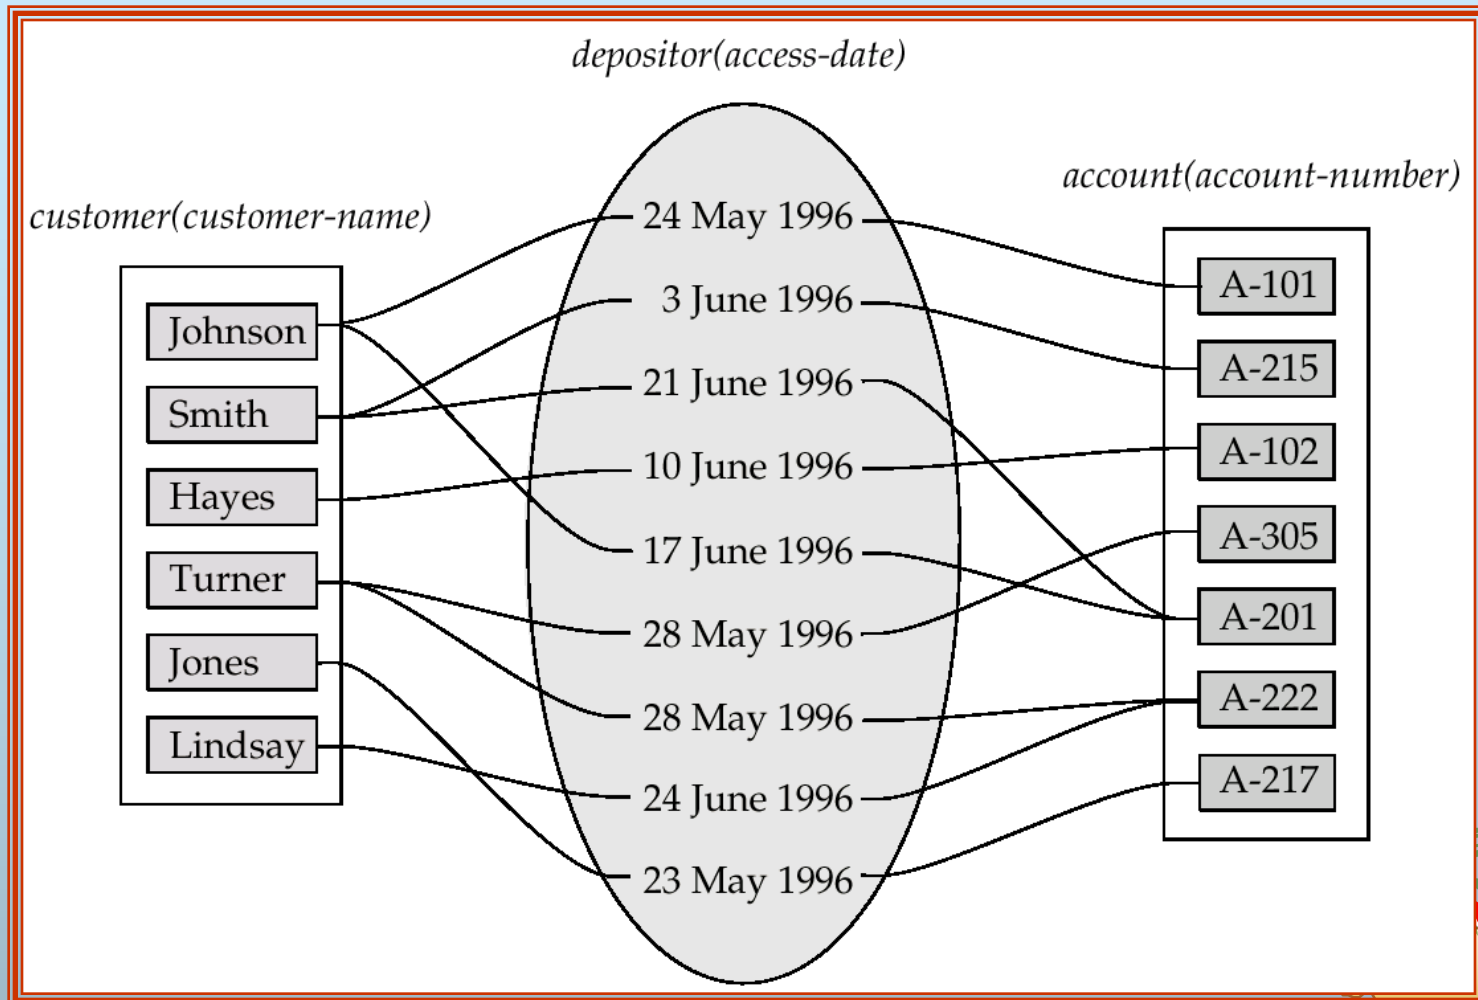



Degree of a Relationship Set


- Refers to number of entity sets that participate in a relationship set.
- Relationship sets that involve two entity sets are *binary* (or degree two). Generally, most relationship sets in a database system are binary.
- Relationship sets may involve more than two entity sets.
 - ★E.g. Suppose employees of a bank may have jobs (responsibilities) at multiple branches, with different jobs at different branches. Then there is a ternary relationship set between entity sets *employee*, *job* and *branch*
- Relationships between more than two entity sets are rare. Most relationships are binary. (More on this later.)

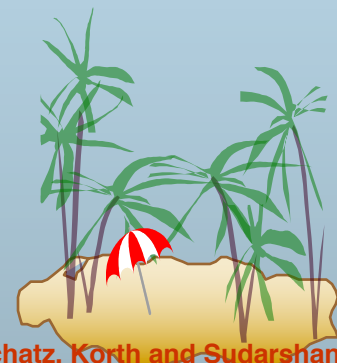




Mapping Cardinalities

- Express the number of entities to which another entity can be associated via a relationship set.
- Most useful in describing binary relationship sets.
- For a binary relationship set the mapping cardinality must be one of the following types:
 - ★ One to one
 - ★ One to many
 - ★ Many to one
 - ★ Many to many

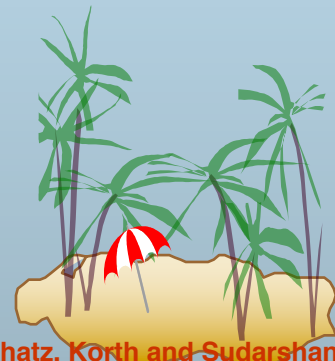

Mapping Cardinalities

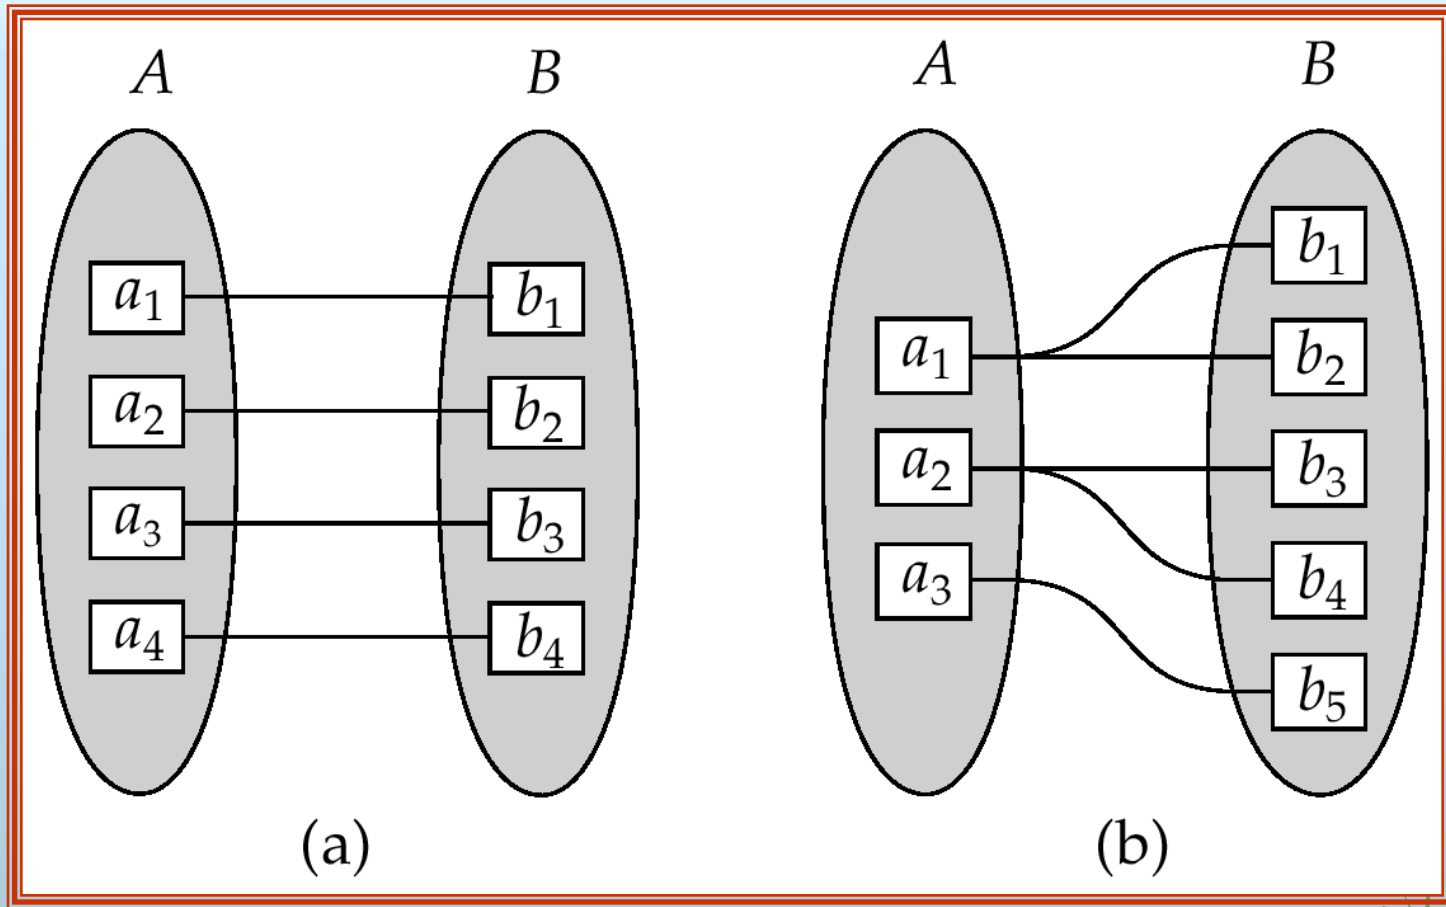

One to one


One to many

Note: Some elements in A and B may not be mapped to any elements in the other set





Mapping Cardinalities

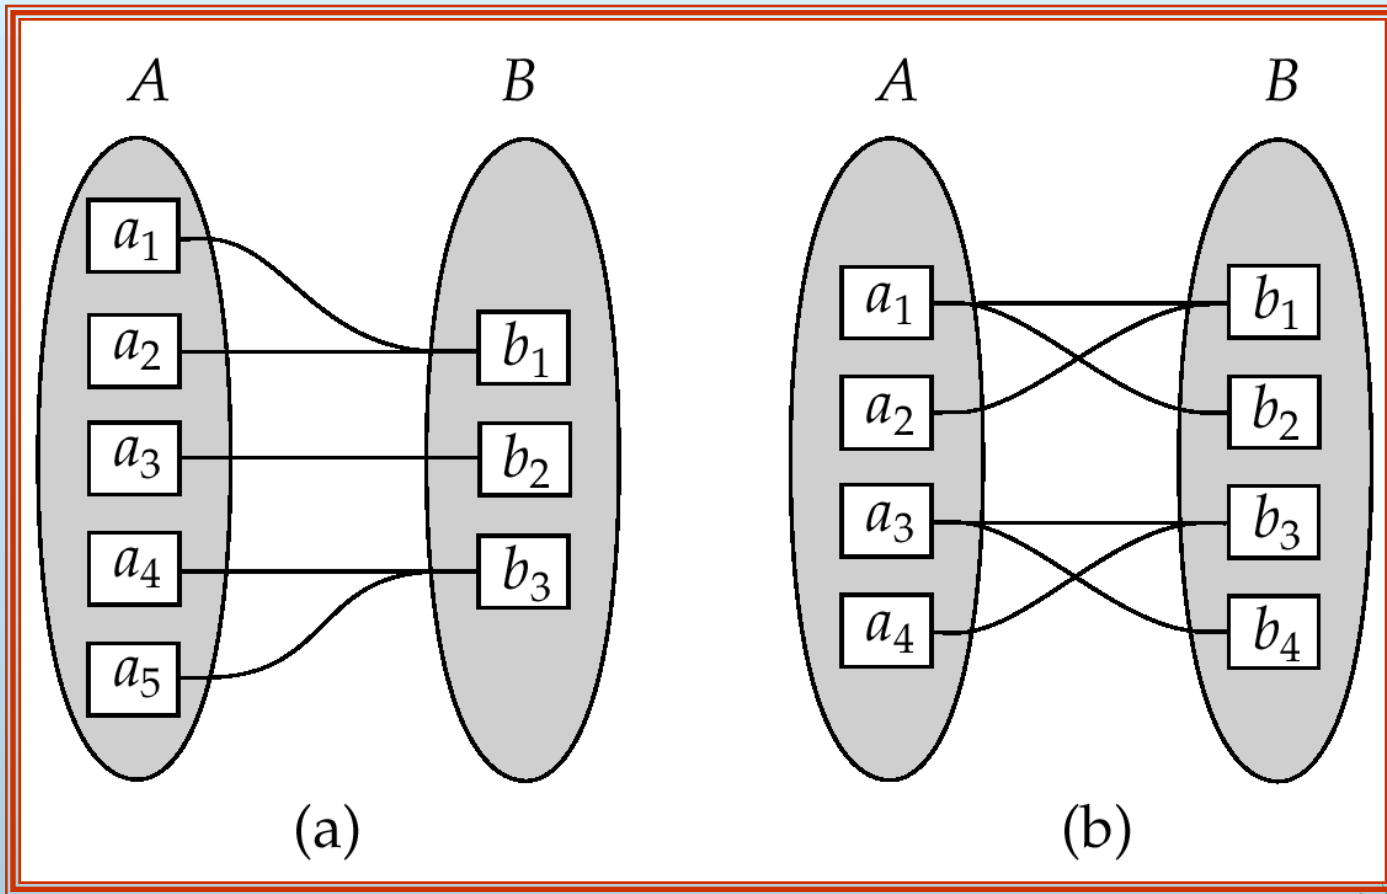

Many to one

Many to many



Note: Some elements in A and B may not be mapped to any elements in the other set






Mapping Cardinalities affect ER Design

- Can make *access-date* an attribute of account, instead of a relationship attribute, if each account can have only one customer
 - I.e., the relationship from account to customer is many to one, or equivalently, customer to account is one to many

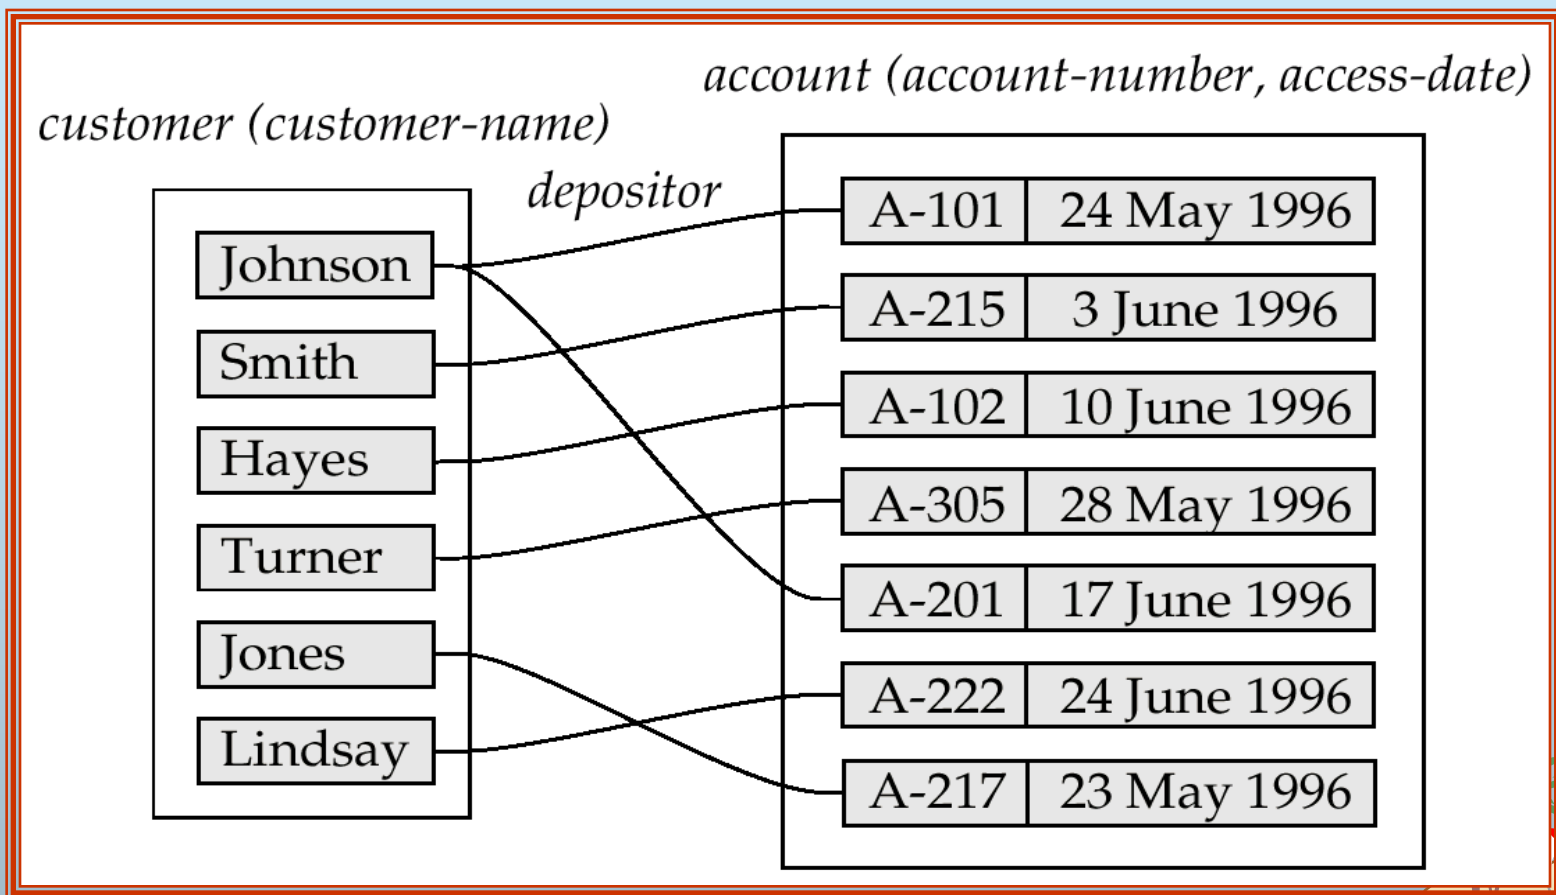

E-R Diagrams


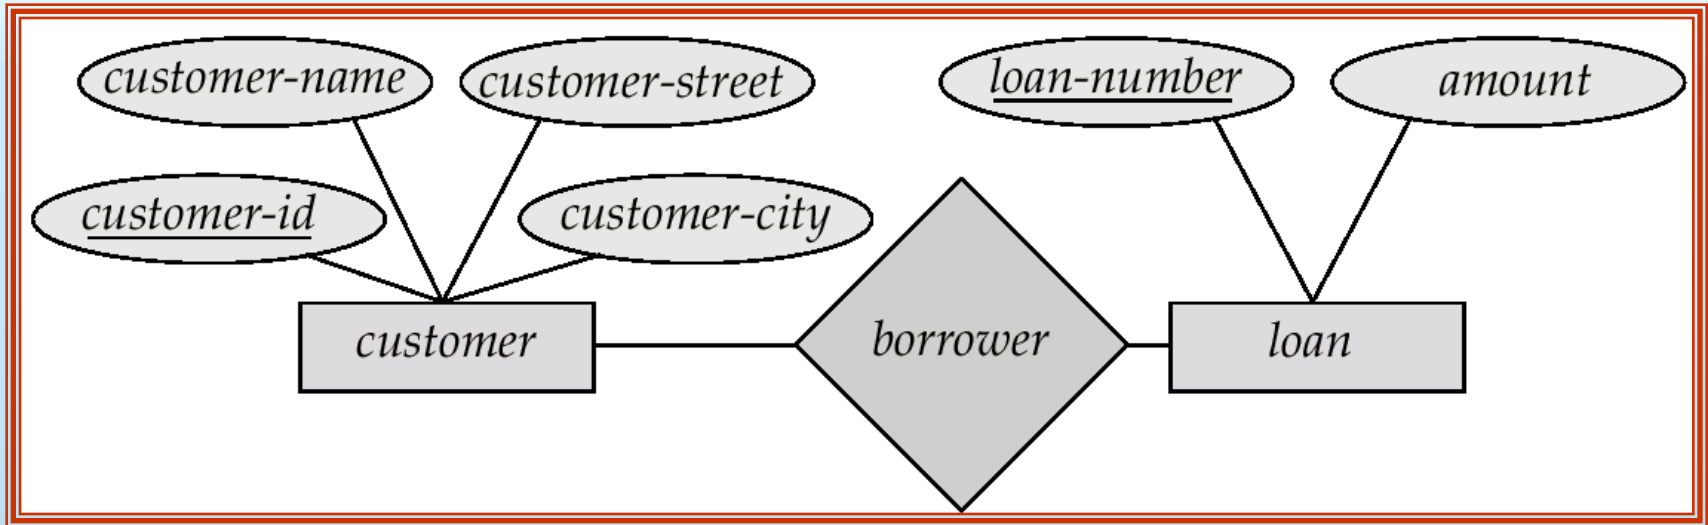


- **Rectangles** represent entity sets.
- **Diamonds** represent relationship sets.
- **Lines** link attributes to entity sets and entity sets to relationship sets.
- **Ellipses** represent attributes
 - **Double ellipses** represent multivalued attributes.
 - **Dashed ellipses** denote derived attributes.
- **Underline** indicates primary key attributes (will study later)







E-R Diagram With Composite, Multivalued, and Derived Attributes

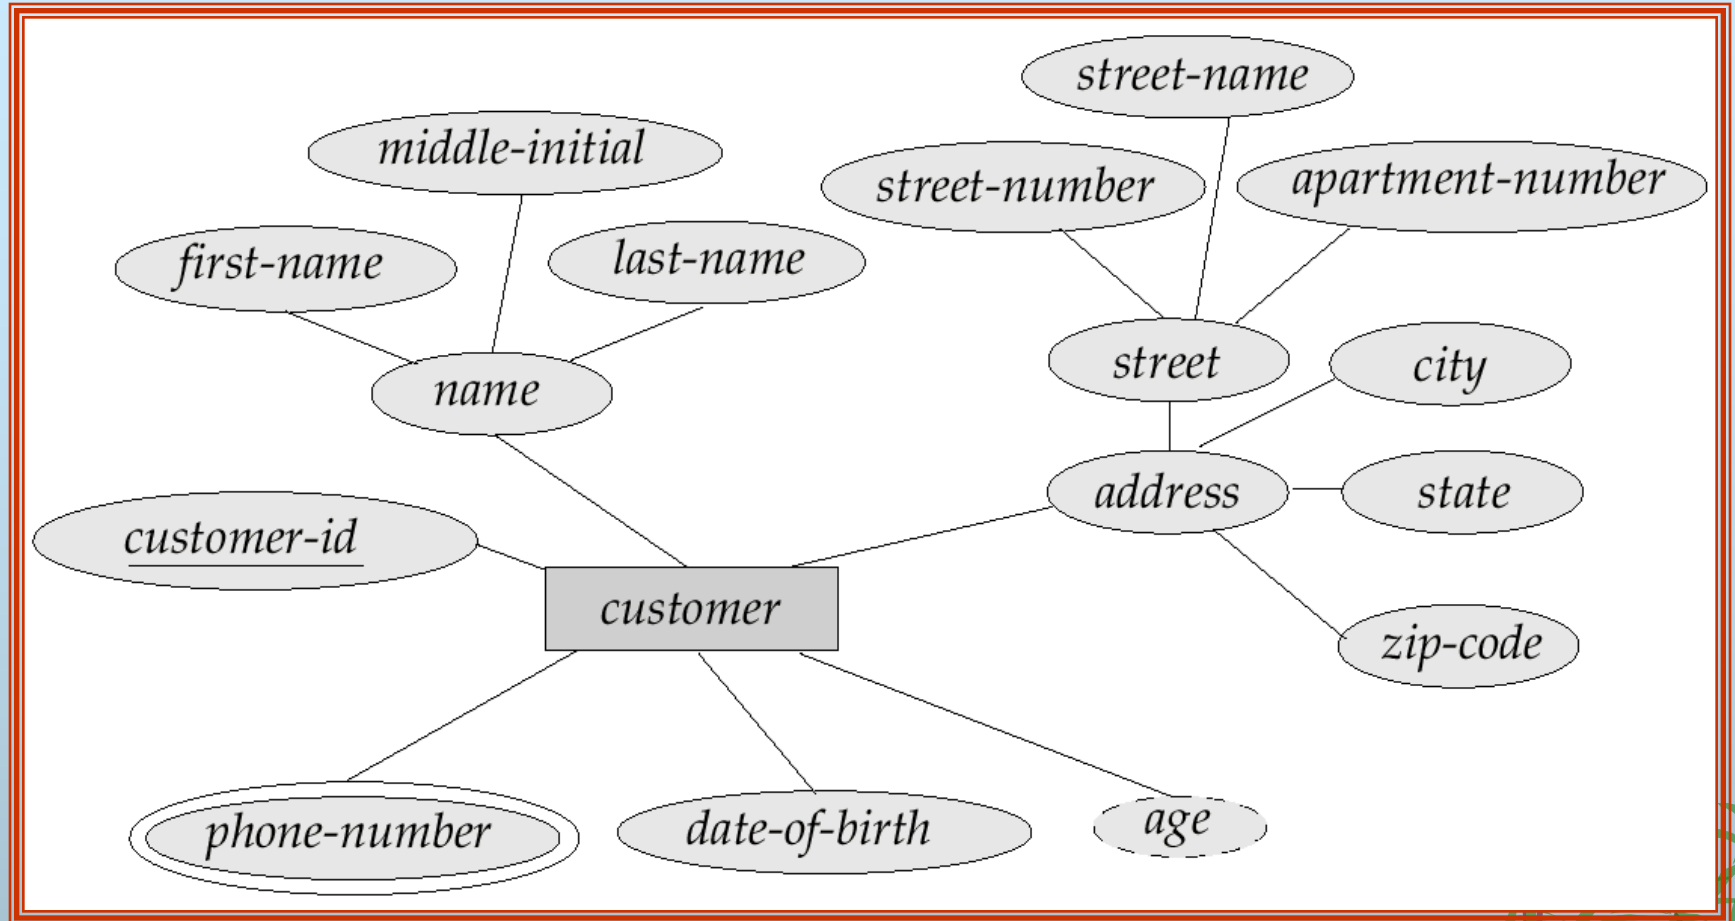




Relationship Sets with Attributes

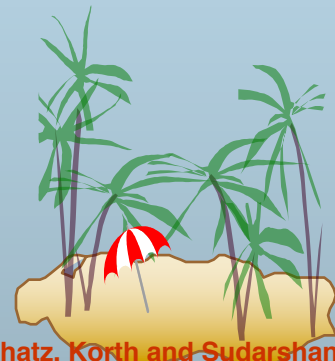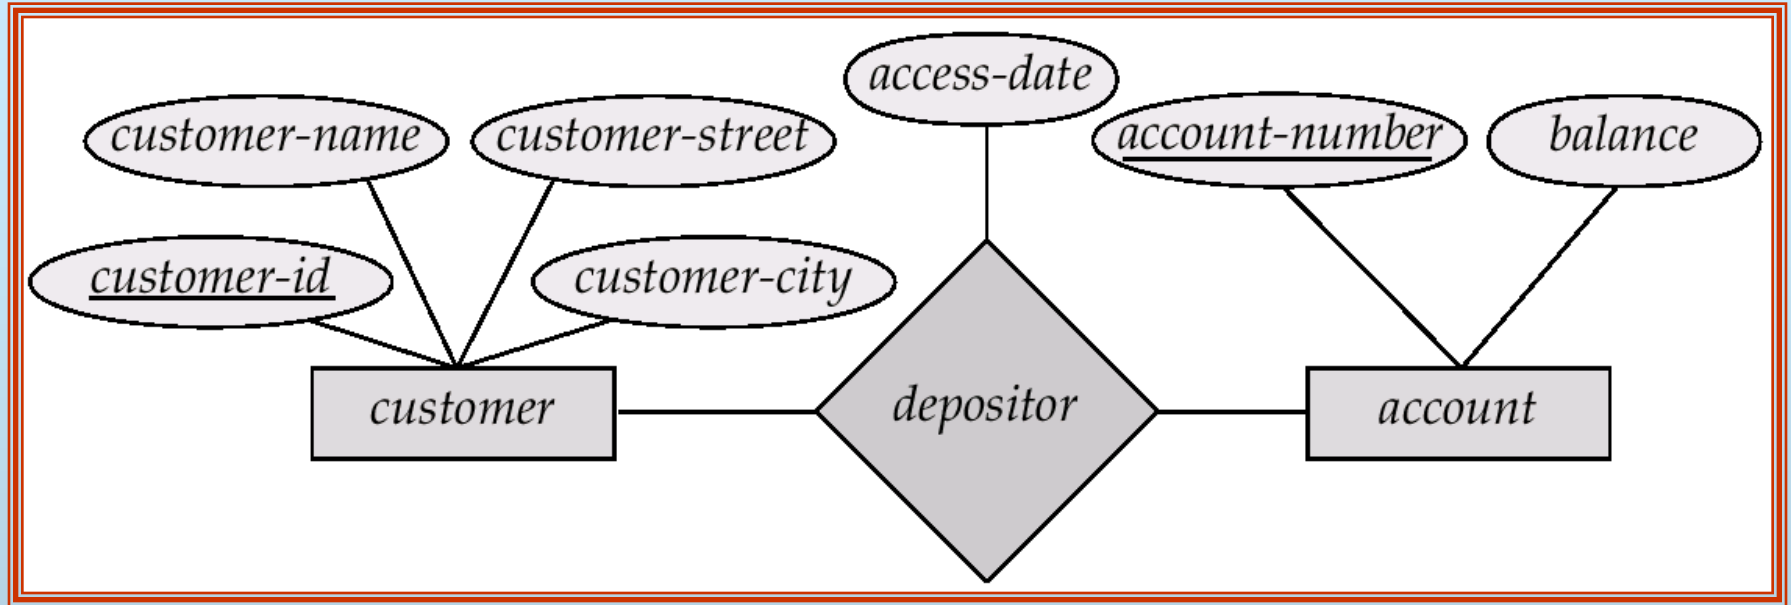



Roles



- Entity sets of a relationship need not be distinct
- The labels “manager” and “worker” are called **roles**; they specify how employee entities interact via the works-for relationship set.
- Roles are indicated in E-R diagrams by labeling the lines that connect diamonds to rectangles.
- Role labels are optional, and are used to clarify semantics of the relationship

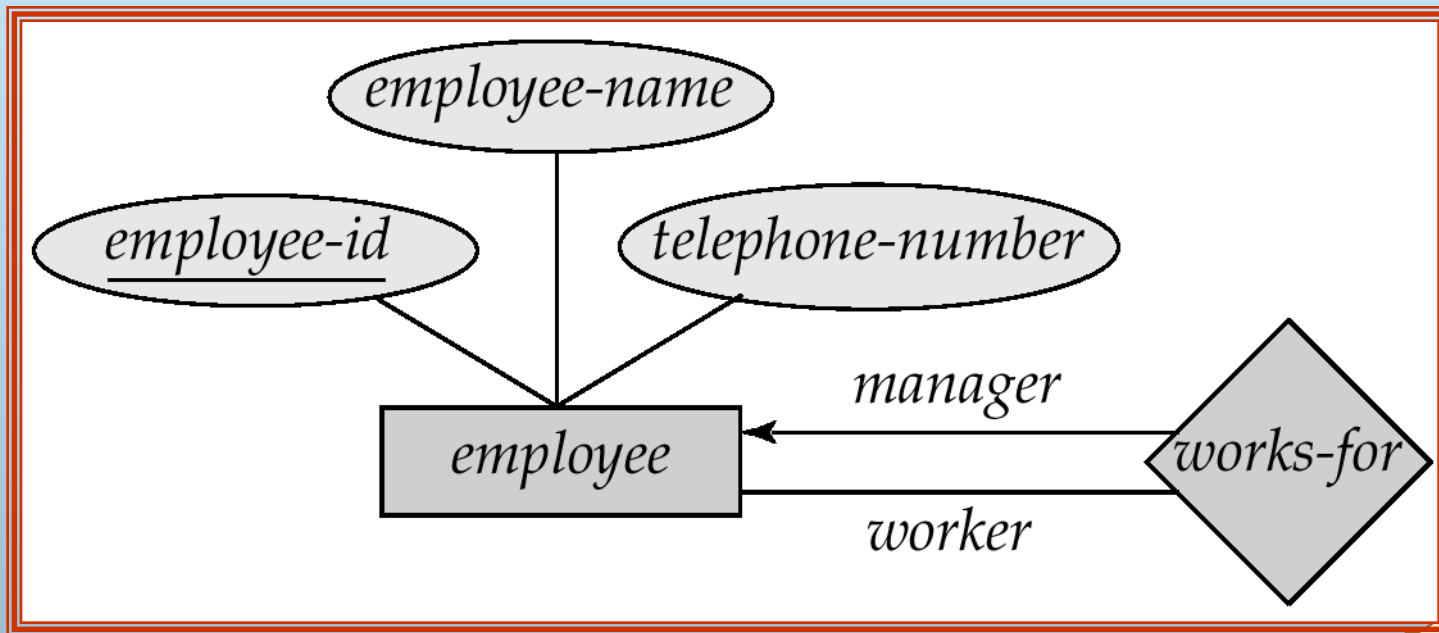



Cardinality Constraints



- We express cardinality constraints by drawing either a directed line (\rightarrow), signifying “one,” or an undirected line ($—$), signifying “many,” between the relationship set and the entity set.
- E.g.: One-to-one relationship:
 - ★ A customer is associated with at most one loan via the relationship *borrower*
 - ★ A loan is associated with at most one customer via *borrower*

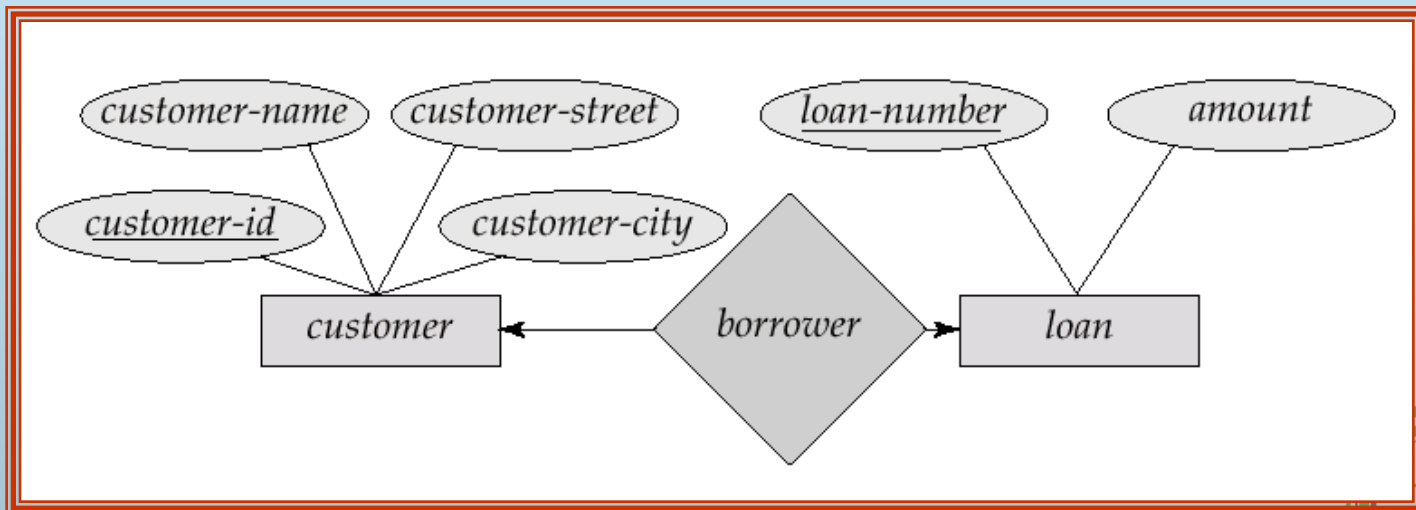



One-To-Many Relationship


- In the one-to-many relationship a loan is associated with at most one customer via *borrower*, a customer is associated with several (including 0) loans via *borrower*

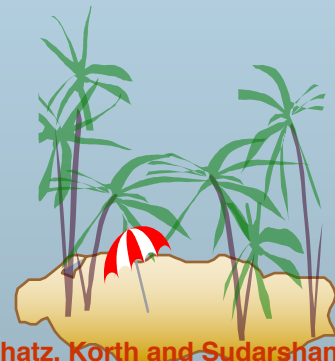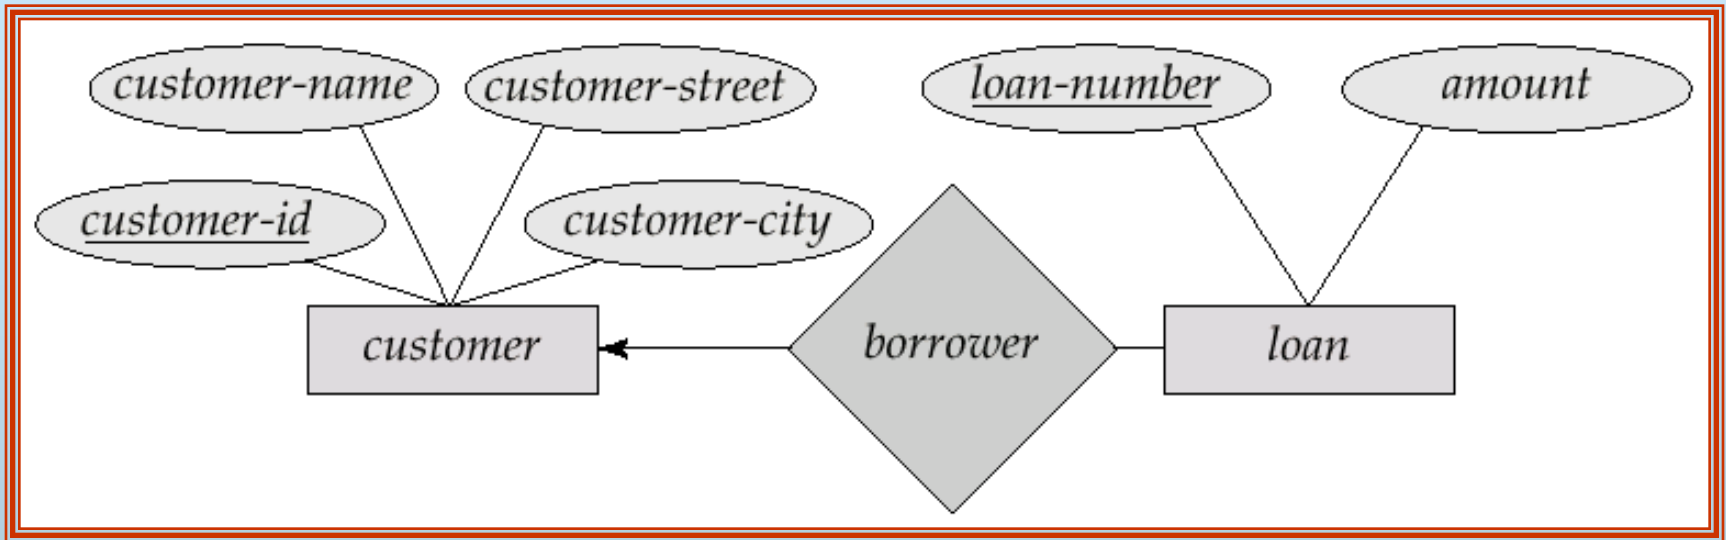




Many-To-One Relationships

- In a many-to-one relationship a loan is associated with several (including 0) customers via *borrower*, a customer is associated with at most one loan via *borrower*

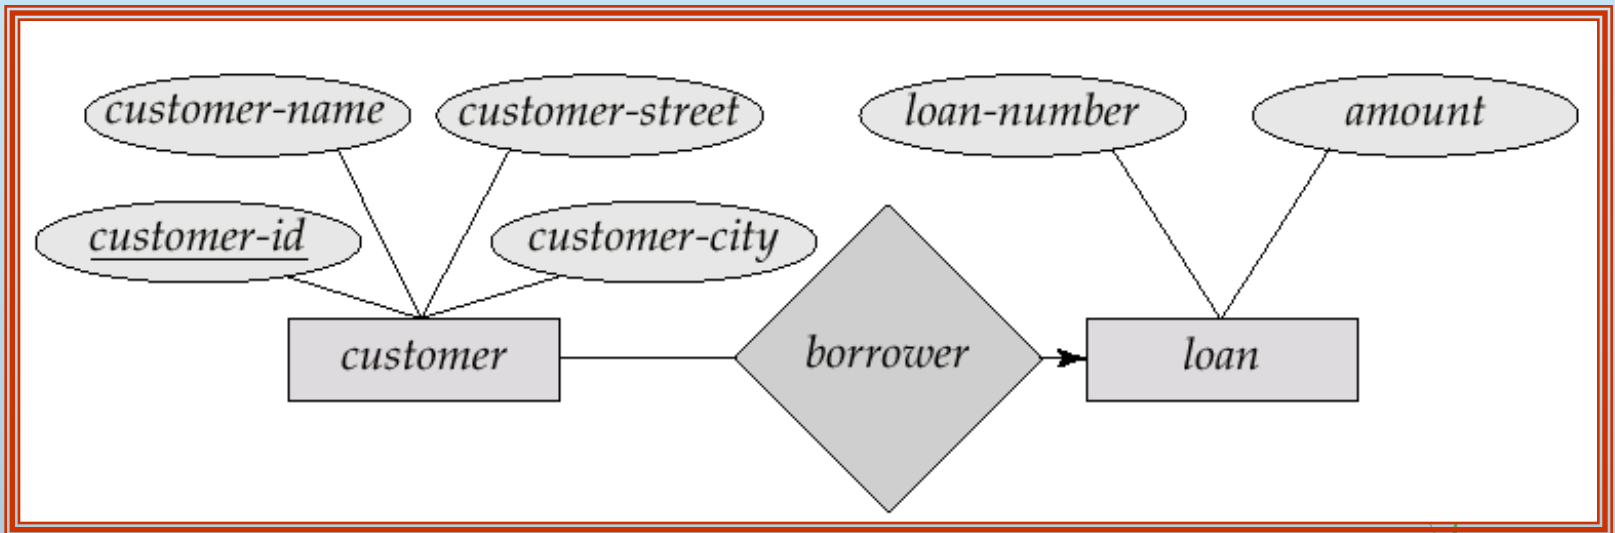




Many-To-Many Relationship

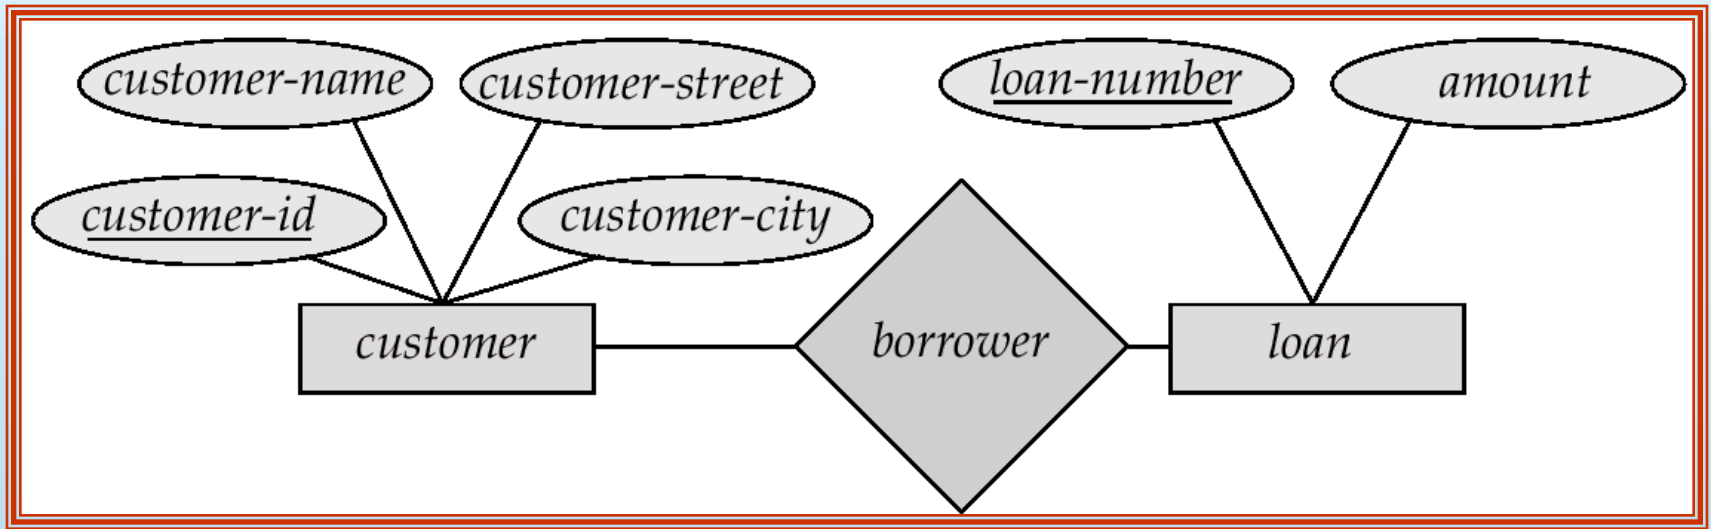



- A customer is associated with several (possibly 0) loans via borrower
- A loan is associated with several (possibly 0) customers via borrower

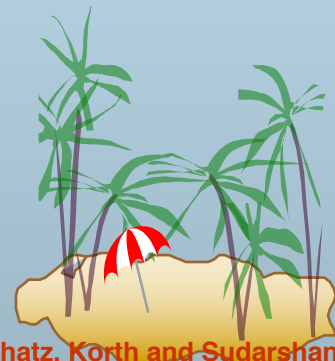



Participation of an Entity Set in a Relationship Set



- **Total participation** (indicated by double line): every entity in the entity set participates in at least one relationship in the relationship set
 - E.g. participation of *loan* in *borrower* is total
 - every loan must have a customer associated to it via borrower
- **Partial participation**: some entities may not participate in any relationship in the relationship set
 - E.g. participation of *customer* in *borrower* is partial

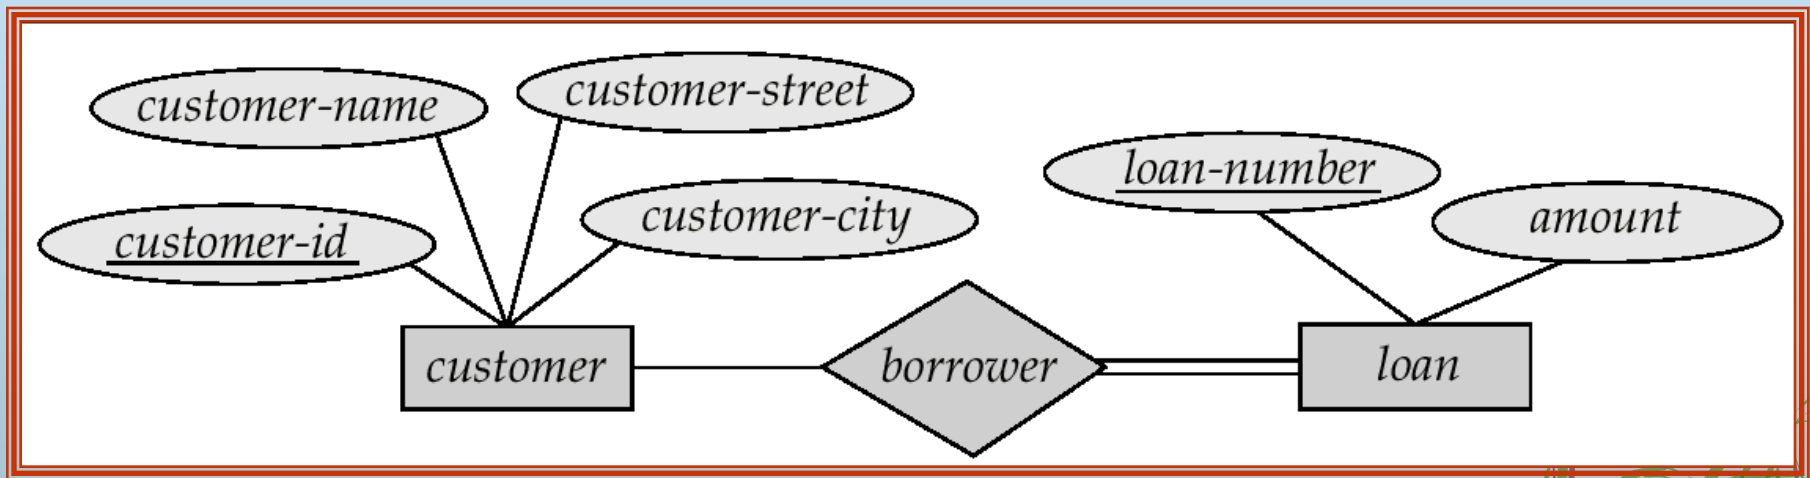



Alternative Notation for Cardinality Limits


- Cardinality limits can also express participation constraints

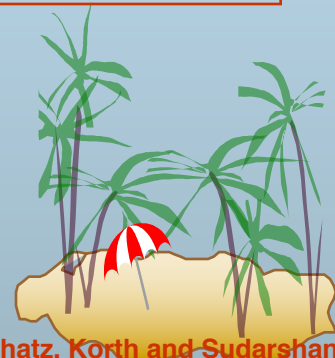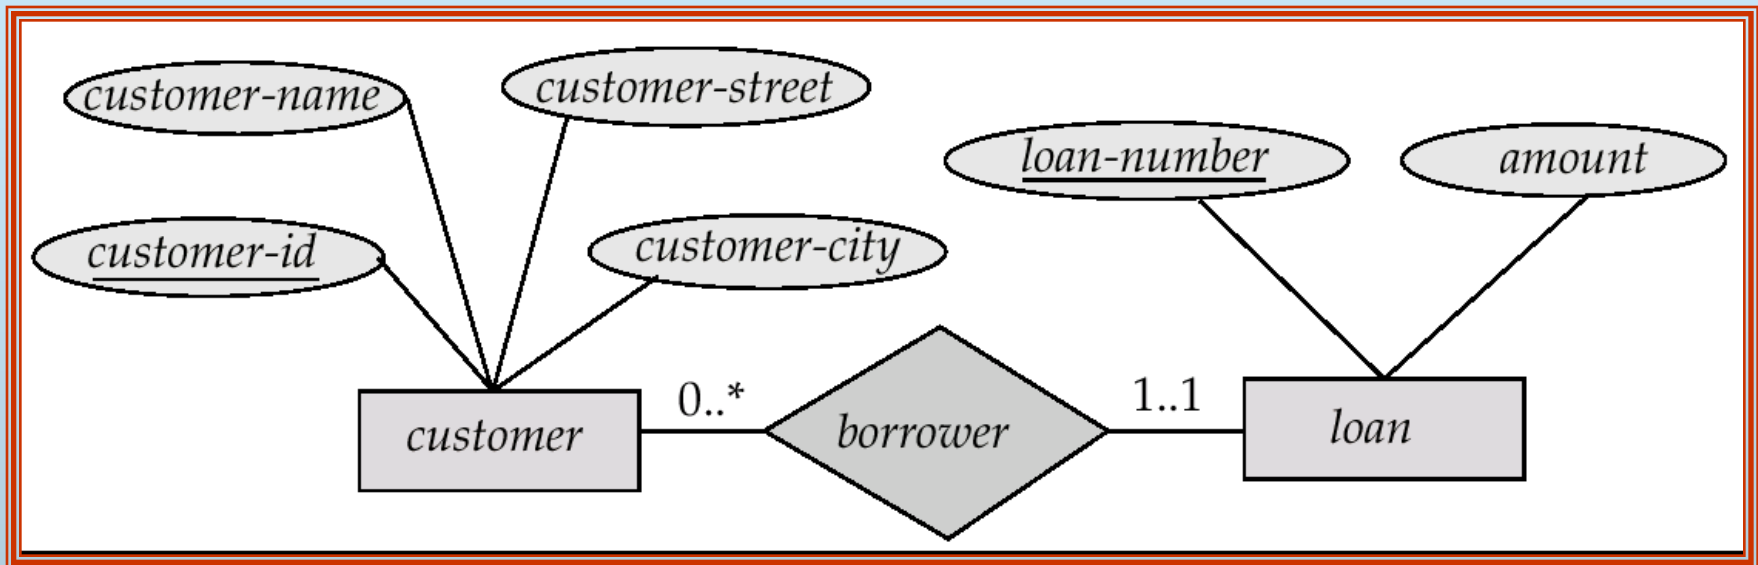



Keys


- A *super key* of an entity set is a set of one or more attributes whose values uniquely determine each entity.
- A *candidate key* of an entity set is a minimal super key
 - ★ *Customer-id* is candidate key of *customer*
 - ★ *account-number* is candidate key of *account*
- Although several candidate keys may exist, one of the candidate keys is selected to be the *primary key*.

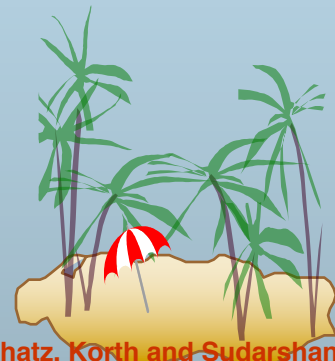





Keys for Relationship Sets

- The combination of primary keys of the participating entity sets forms a super key of a relationship set.
 - ★ *(customer-id, account-number)* is the super key of *depositor*
 - ★ *NOTE: this means a pair of entity sets can have at most one relationship in a particular relationship set.*
 - ✓ E.g. if we wish to track all access-dates to each account by each customer, we cannot assume a relationship for each access. We can use a multivalued attribute though
- Must consider the mapping cardinality of the relationship set when deciding the what are the candidate keys
- Need to consider semantics of relationship set in selecting the *primary key* in case of more than one candidate key

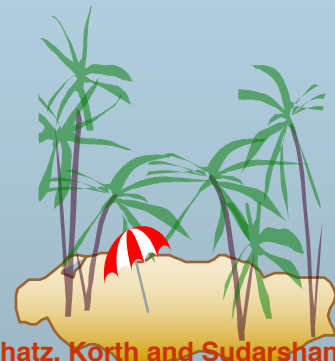


E-R Diagram with a Ternary Relationship

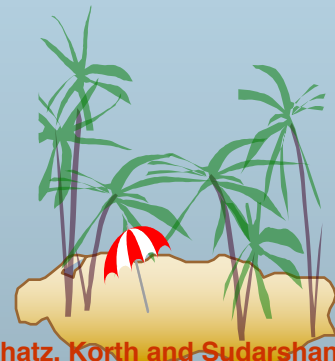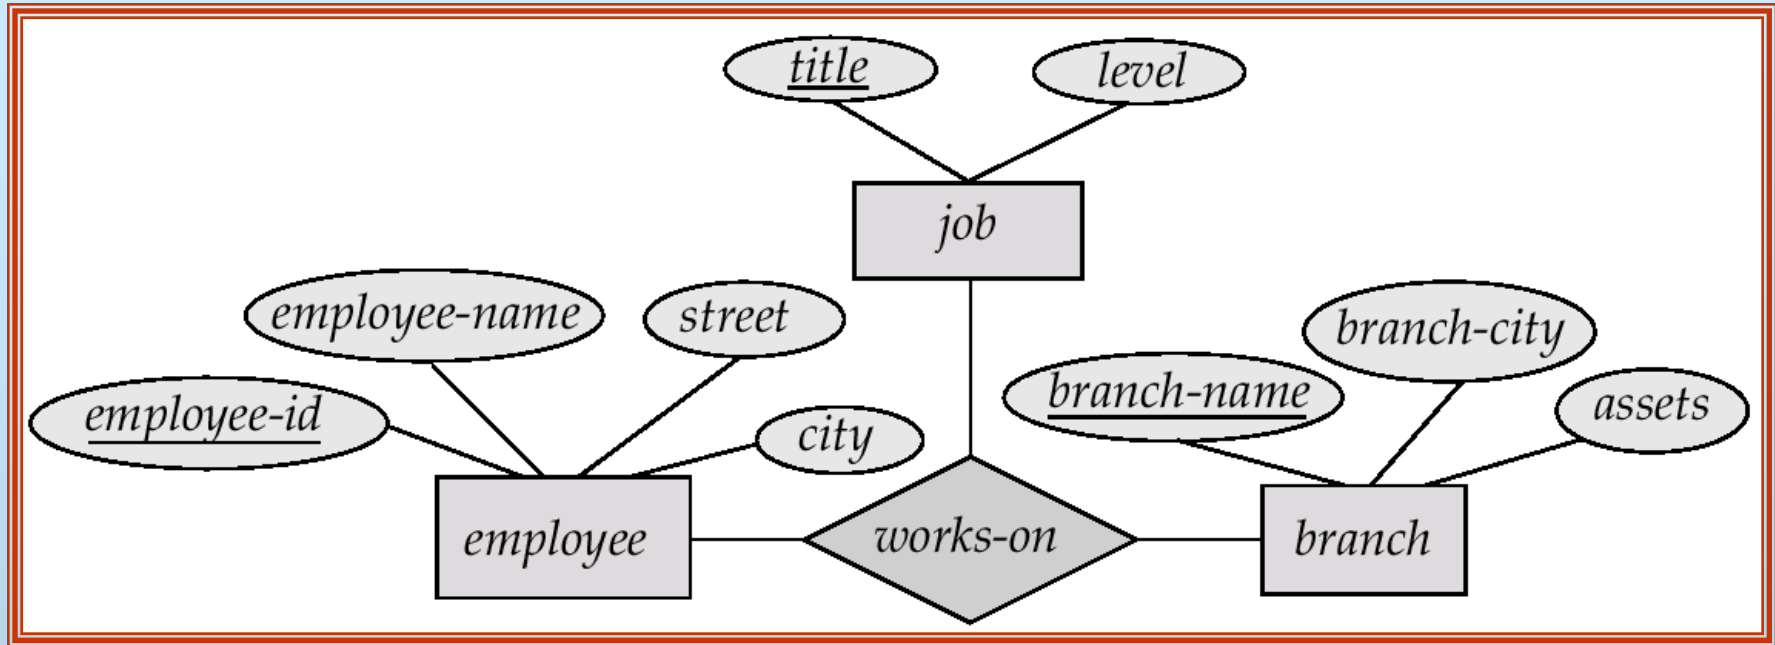



Binary Vs. Non-Binary Relationships

- Some relationships that appear to be non-binary may be better represented using binary relationships
 - ★ E.g. A ternary relationship *parents*, relating a child to his/her father and mother, is best replaced by two binary relationships, *father* and *mother*
 - ✓ Using two binary relationships allows partial information (e.g. only mother being know)
 - ★ But there are some relationships that are naturally non-binary
 - ✓ E.g. *works-on*

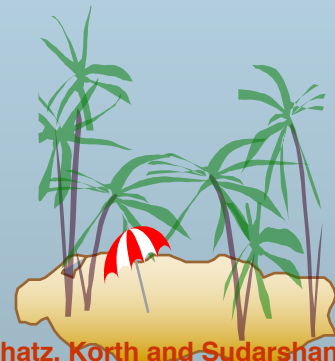



Converting Non-Binary Relationships to Binary Form

- In general, any non-binary relationship can be represented using binary relationships by creating an artificial entity set.

- ★ Replace R between entity sets A , B and C by an entity set E , and three relationship sets:

1. R_A , relating E and A

2. R_B , relating E and B

3. R_C , relating E and C

- ★ Create a special identifying attribute for E

- ★ Add any attributes of R to E



- ★ For each relationship (a_i, b_i, c_i) in R , create

1. a new entity e_i in the entity set E

2. add (e_i, a_i) to R_A

3. add (e_i, b_i) to R_B

4. add (e_i, c_i) to R_C

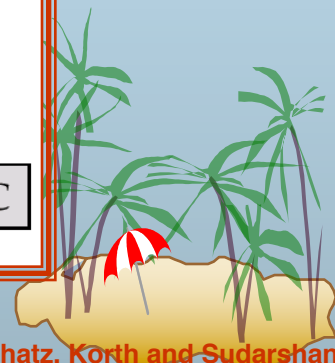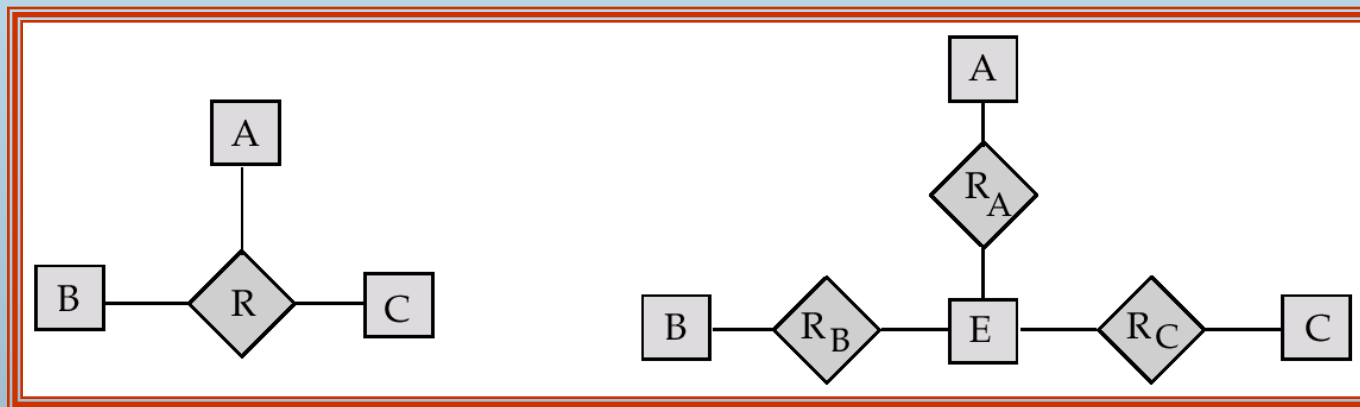



Design Issues

- Use of entity sets vs. attributes
Choice mainly depends on the structure of the enterprise being modeled, and on the semantics associated with the attribute in question.
- Use of entity sets vs. relationship sets
Possible guideline is to designate a relationship set to describe an action that occurs between entities
- Binary versus n -ary relationship sets
Although it is possible to replace any nonbinary (n -ary, for $n > 2$) relationship set by a number of distinct binary relationship sets, a n -ary relationship set shows more clearly that several entities participate in a single relationship.
- Placement of relationship attributes





Weak Entity Sets



- An entity set that does not have a primary key is referred to as a *weak entity set*.
- The existence of a weak entity set depends on the existence of a *identifying entity set*
 - ★ it must relate to the identifying entity set via a total, one-to-many relationship set from the identifying to the weak entity set
 - ★ *Identifying relationship* depicted using a double diamond
- The *discriminator* (or *partial key*) of a weak entity set is the set of attributes that distinguishes among all the entities of a weak entity set.
- The primary key of a weak entity set is formed by the primary key of the strong entity set on which the weak entity set is existence dependent, plus the weak entity set's discriminator.





Weak Entity Sets (Cont.)


- We depict a weak entity set by double rectangles.
- We underline the discriminator of a weak entity set with a dashed line.
- *payment-number* – discriminator of the *payment* entity set
- Primary key for *payment* – (*loan-number*, *payment-number*)

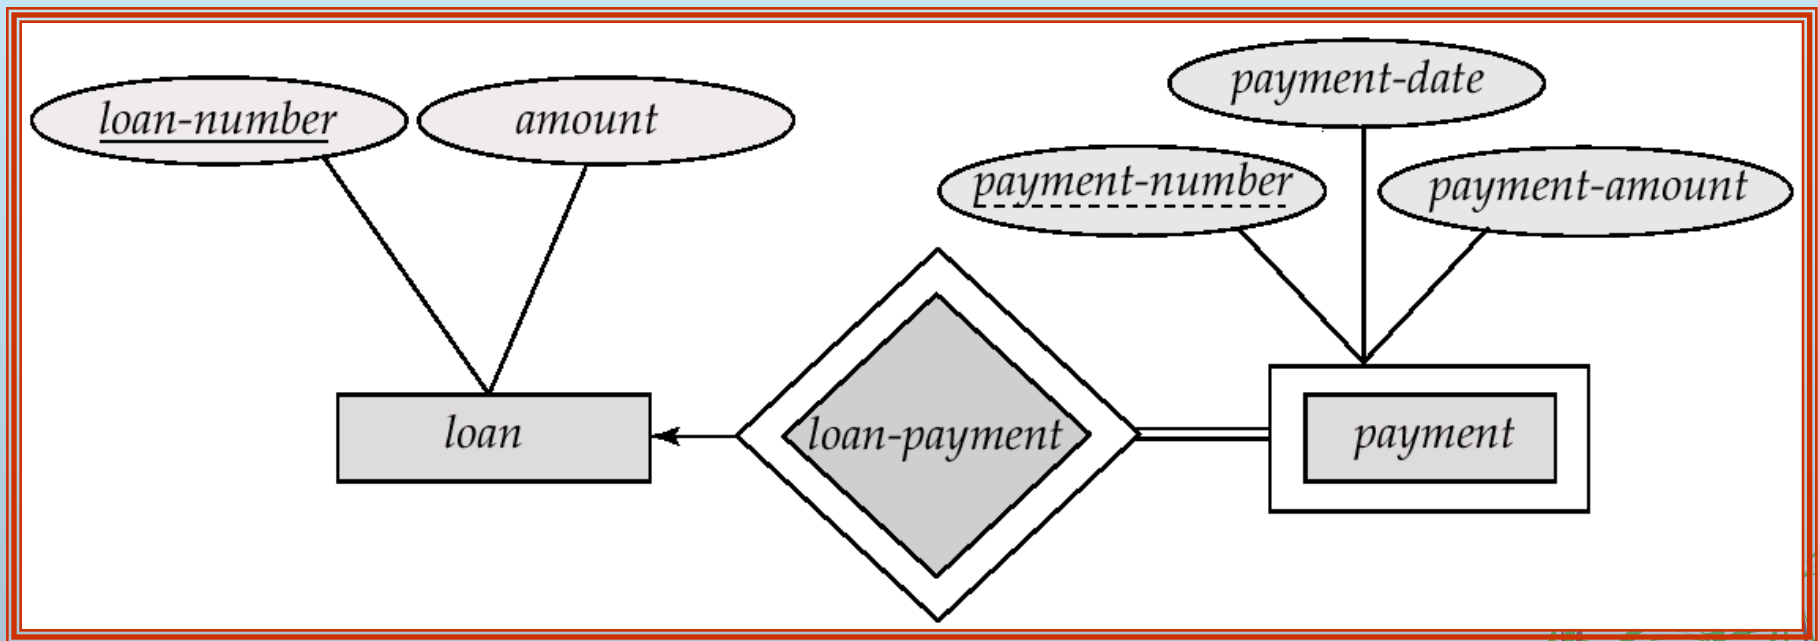



Weak Entity Sets (Cont.)

- Note: the primary key of the strong entity set is not explicitly stored with the weak entity set, since it is implicit in the identifying relationship.
- If *loan-number* were explicitly stored, *payment* could be made a strong entity, but then the relationship between *payment* and *loan* would be duplicated by an implicit relationship defined by the attribute *loan-number* common to *payment* and *loan*

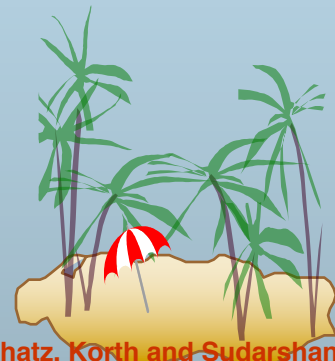




More Weak Entity Set Examples

- In a university, a *course* is a strong entity and a *course-offering* can be modeled as a weak entity
- The discriminator of *course-offering* would be *semester* (including year) and *section-number* (if there is more than one section)
- If we model *course-offering* as a strong entity we would model *course-number* as an attribute.

Then the relationship with *course* would be implicit in the *course-number* attribute

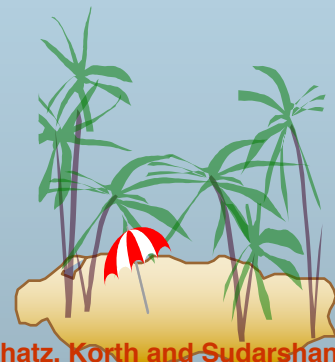




Specialization

- Top-down design process; we designate subgroupings within an entity set that are distinctive from other entities in the set.
- These subgroupings become lower-level entity sets that have attributes or participate in relationships that do not apply to the higher-level entity set.
- Depicted by a *triangle* component labeled ISA (E.g. *customer* “is a” *person*).
- **Attribute inheritance** – a lower-level entity set inherits all the attributes and relationship participation of the higher-level entity set to which it is linked.




Specialization Example

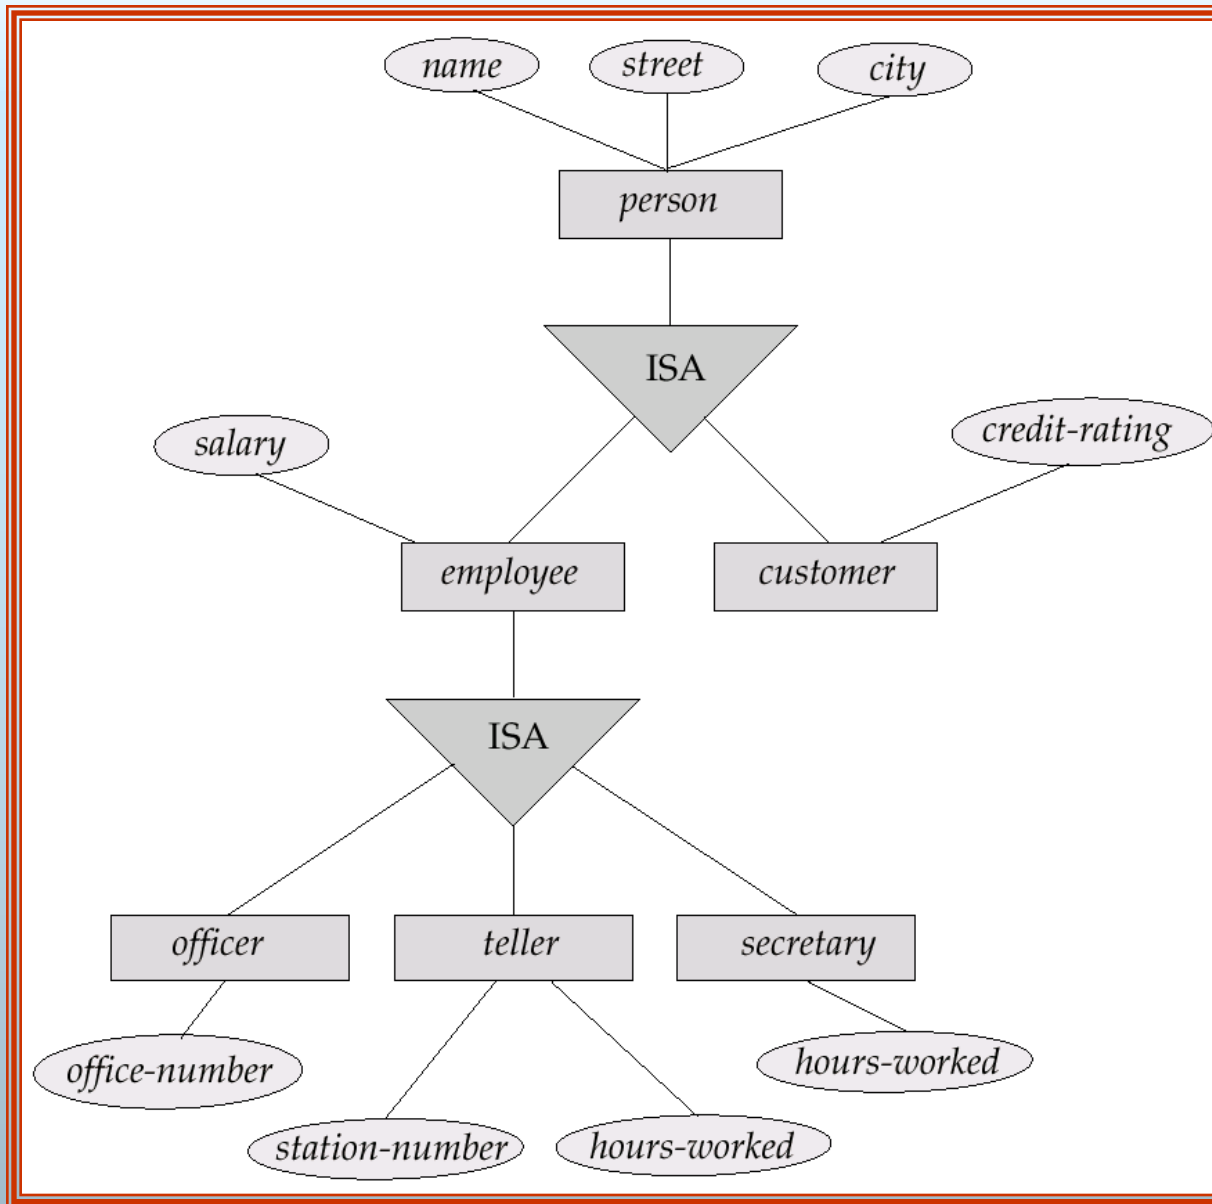



Generalization


- A bottom-up design process – combine a number of entity sets that share the same features into a higher-level entity set.
- Specialization and generalization are simple inversions of each other; they are represented in an E-R diagram in the same way.
- The terms specialization and generalization are used interchangeably.

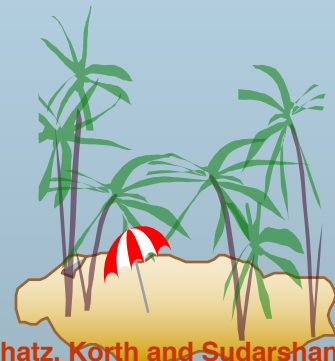



Specialization and Generalization (Contd.)

- Can have multiple specializations of an entity set based on different features.
- E.g. *permanent-employee* vs. *temporary-employee*, in addition to *officer* vs. *secretary* vs. *teller*
- Each particular employee would be
 - ★ a member of one of *permanent-employee* or *temporary-employee*,
 - ★ and also a member of one of *officer*, *secretary*, or *teller*
- The ISA relationship also referred to as **superclass - subclass** relationship

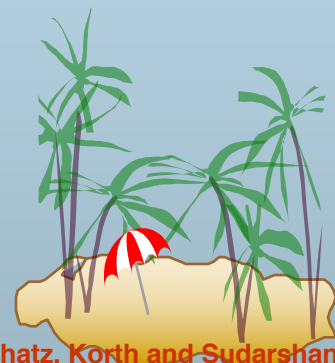



Design Constraints on a Specialization/Generalization


- Constraint on which entities can be members of a given lower-level entity set.
 - ★ condition-defined
 - ✓ E.g. all customers over 65 years are members of *senior-citizen* entity set; *senior-citizen* ISA *person*.
 - ★ user-defined
- Constraint on whether or not entities may belong to more than one lower-level entity set within a single generalization.
 - ★ Disjoint
 - ✓ an entity can belong to only one lower-level entity set
 - ✓ Noted in E-R diagram by writing *disjoint* next to the ISA triangle
 - ★ Overlapping
 - ✓ an entity can belong to more than one lower-level entity set





Design Constraints on a Specialization/Generalization (Contd.)



- **Completeness constraint** -- specifies whether or not an entity in the higher-level entity set must belong to at least one of the lower-level entity sets within a generalization.
 - ★ **total** : an entity must belong to one of the lower-level entity sets
 - ★ **partial**: an entity need not belong to one of the lower-level entity sets

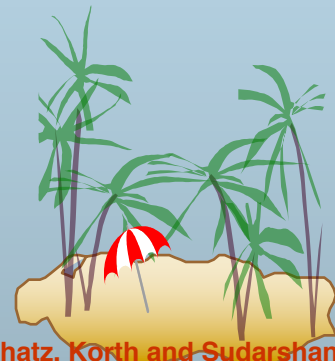



Aggregation

- Consider the ternary relationship *works-on*, which we saw earlier
- Suppose we want to record managers for tasks performed by an employee at a branch

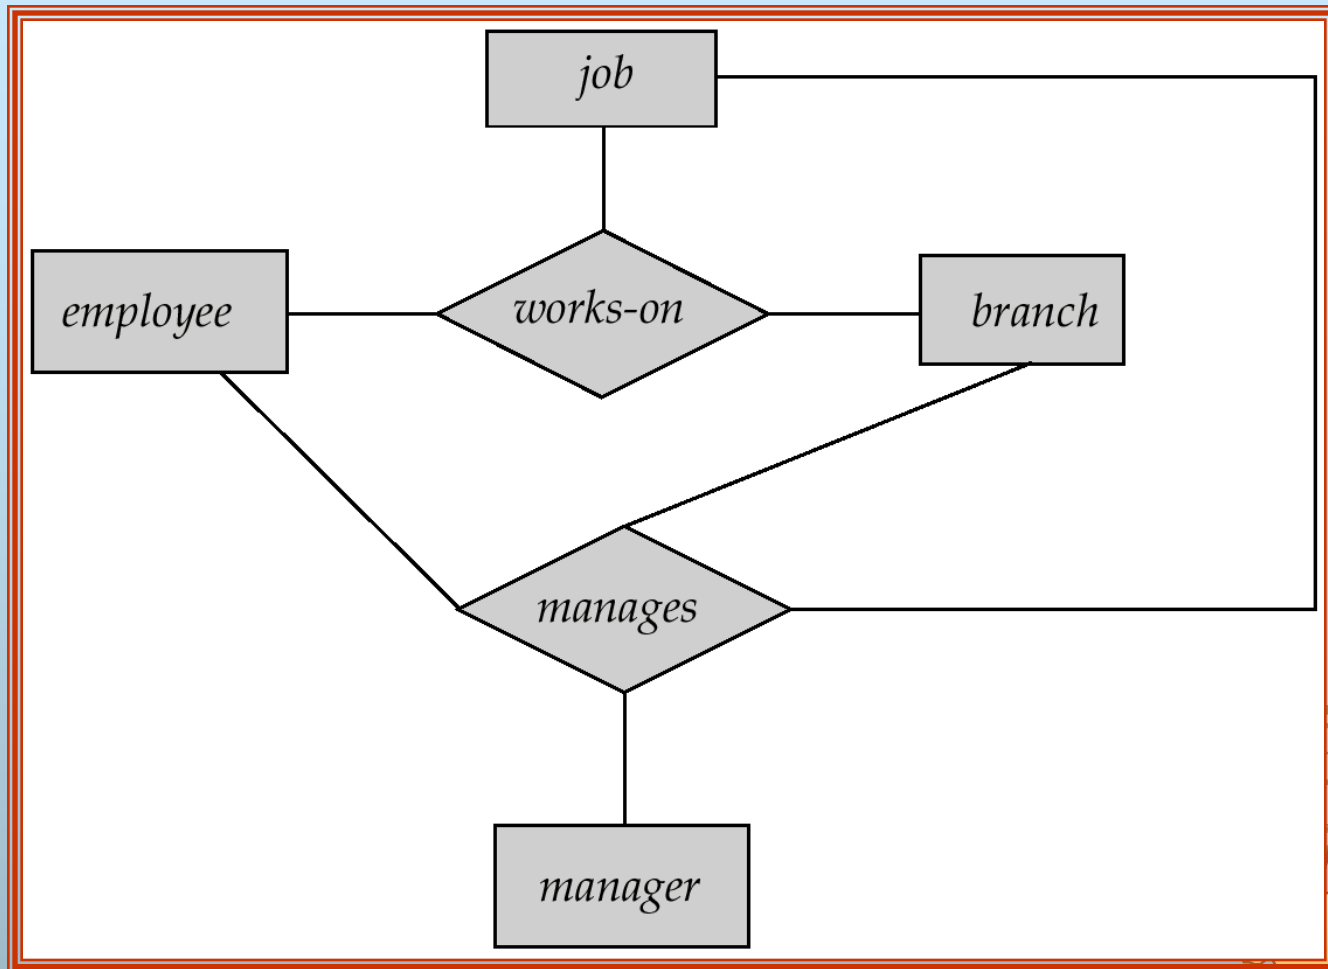





Aggregation (Cont.)

- Relationship sets *works-on* and *manages* represent overlapping information
 - ★ Every *manages* relationship corresponds to a *works-on* relationship
 - ★ However, some *works-on* relationships may not correspond to any *manages* relationships
 - ✓ So we can't discard the *works-on* relationship
- Eliminate this redundancy via *aggregation*
 - ★ Treat relationship as an abstract entity
 - ★ Allows relationships between relationships
 - ★ Abstraction of relationship into new entity
- Without introducing redundancy, the following diagram represents:
 - ★ An employee works on a particular job at a particular branch
 - ★ An employee, branch, job combination may have an associated manager






E-R Diagram With Aggregation

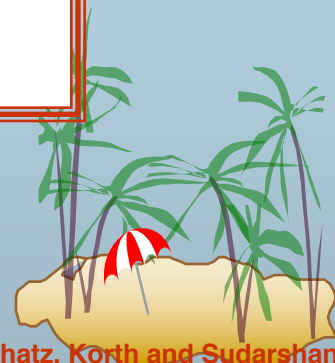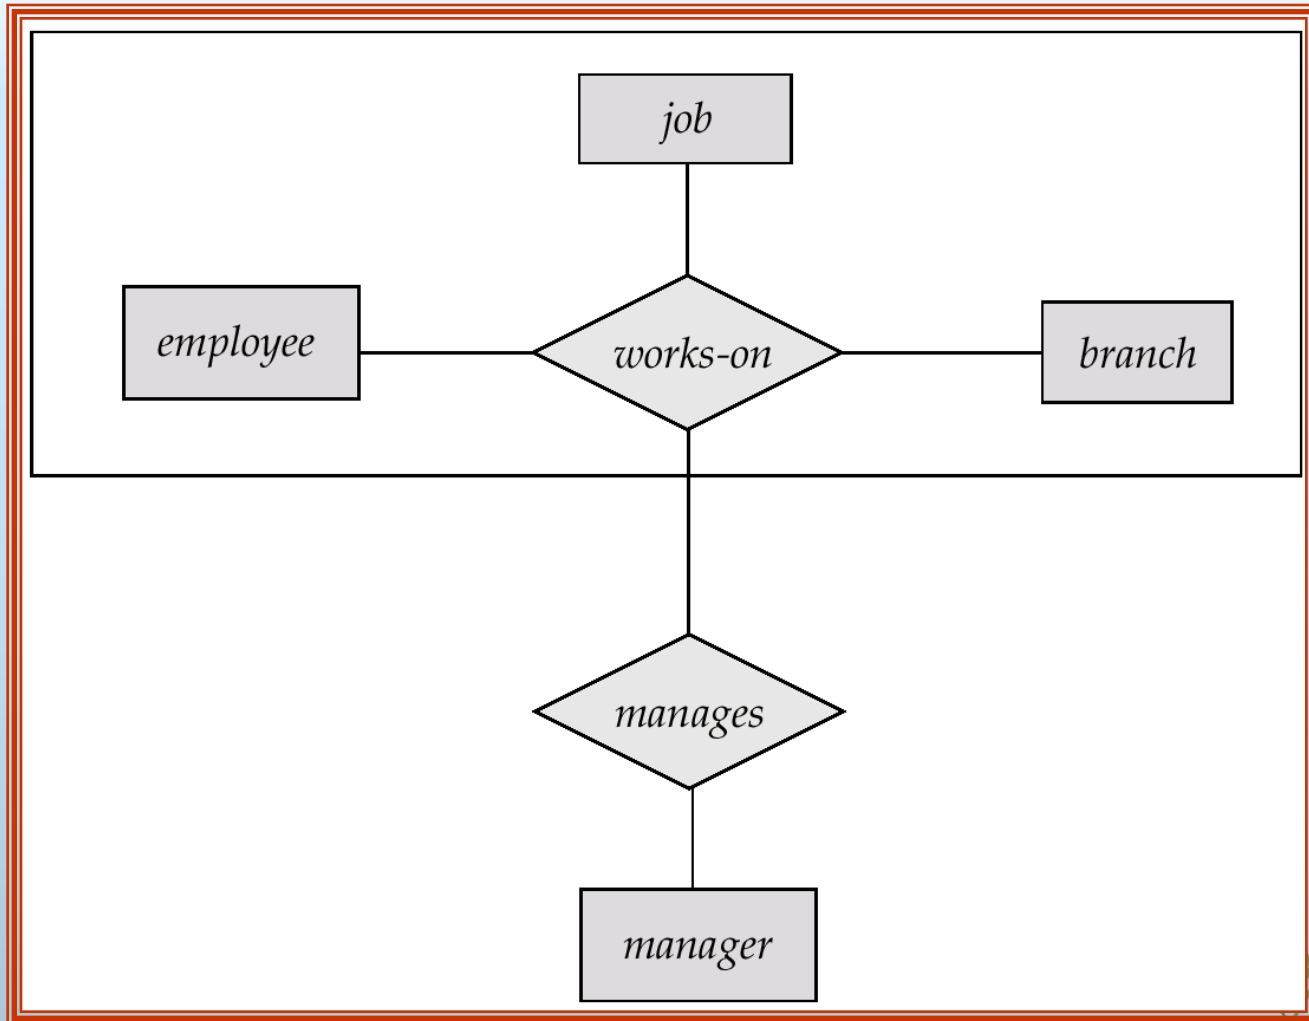




E-R Design Decisions

- The use of an attribute or entity set to represent an object.
- Whether a real-world concept is best expressed by an entity set or a relationship set.
- The use of a ternary relationship versus a pair of binary relationships.
- The use of a strong or weak entity set.
- The use of specialization/generalization – contributes to modularity in the design.
- The use of aggregation – can treat the aggregate entity set as a single unit without concern for the details of its internal structure.

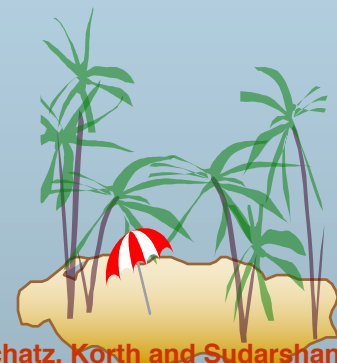





E-R Diagram for a Banking Enterprise

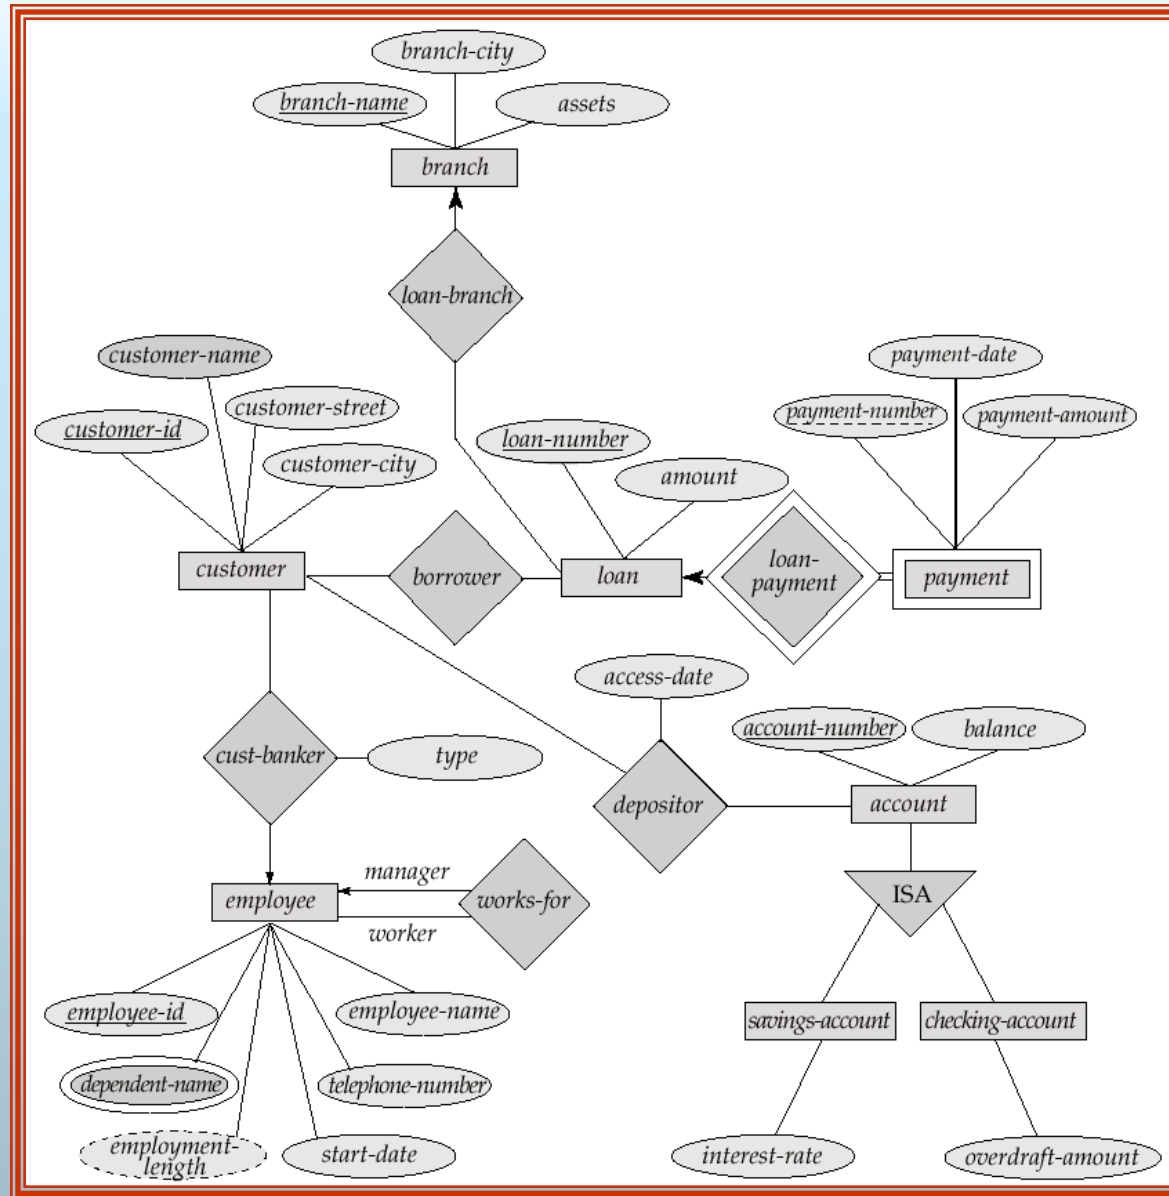





Summary of Symbols Used in E-R Notation

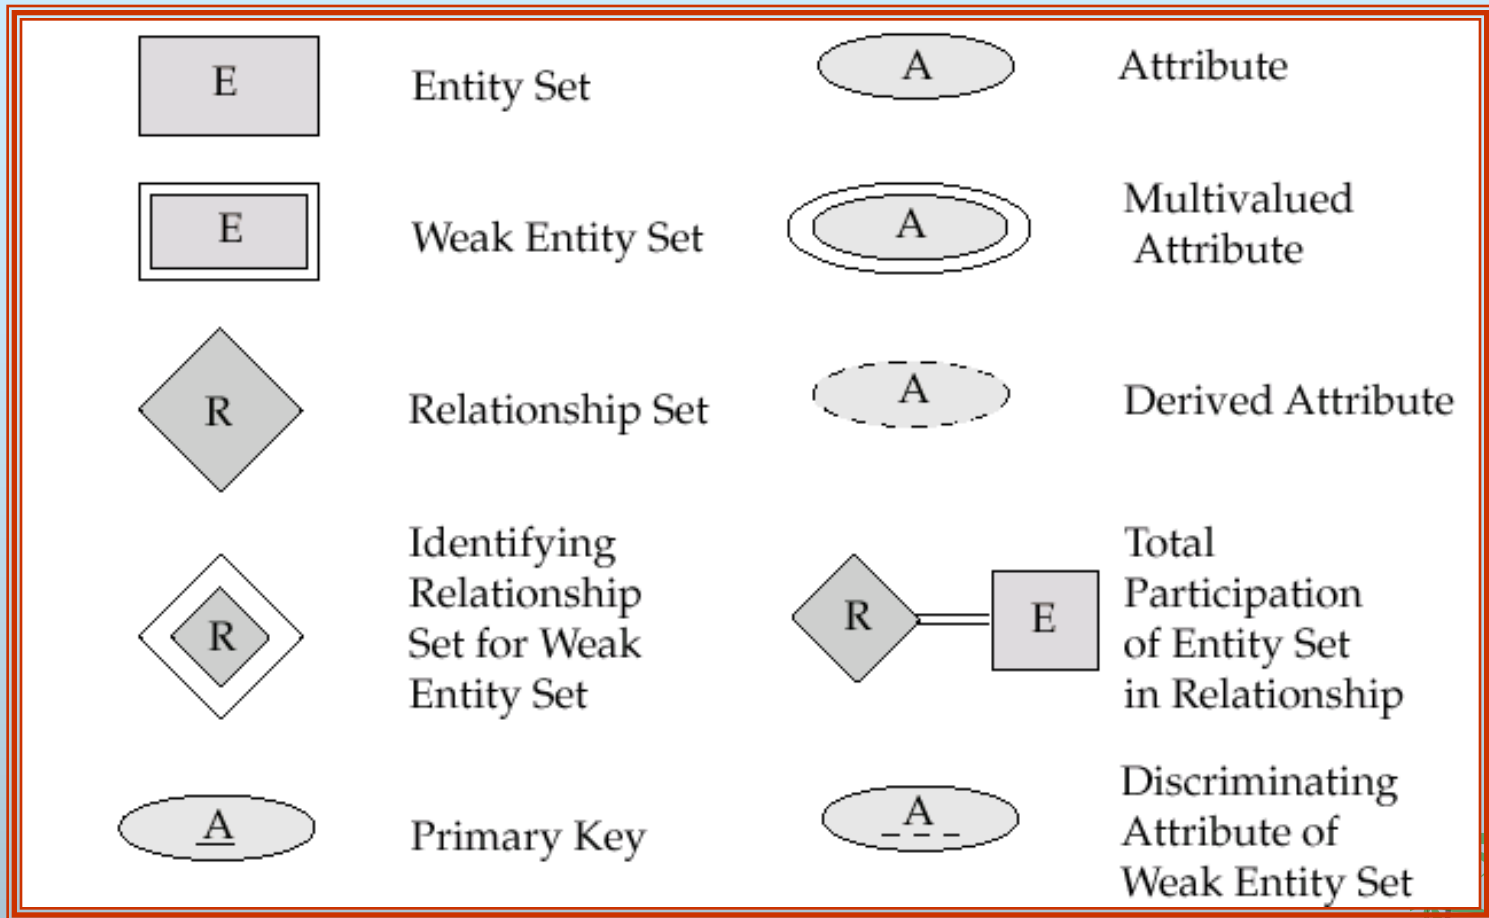



Summary of Symbols (Cont.)


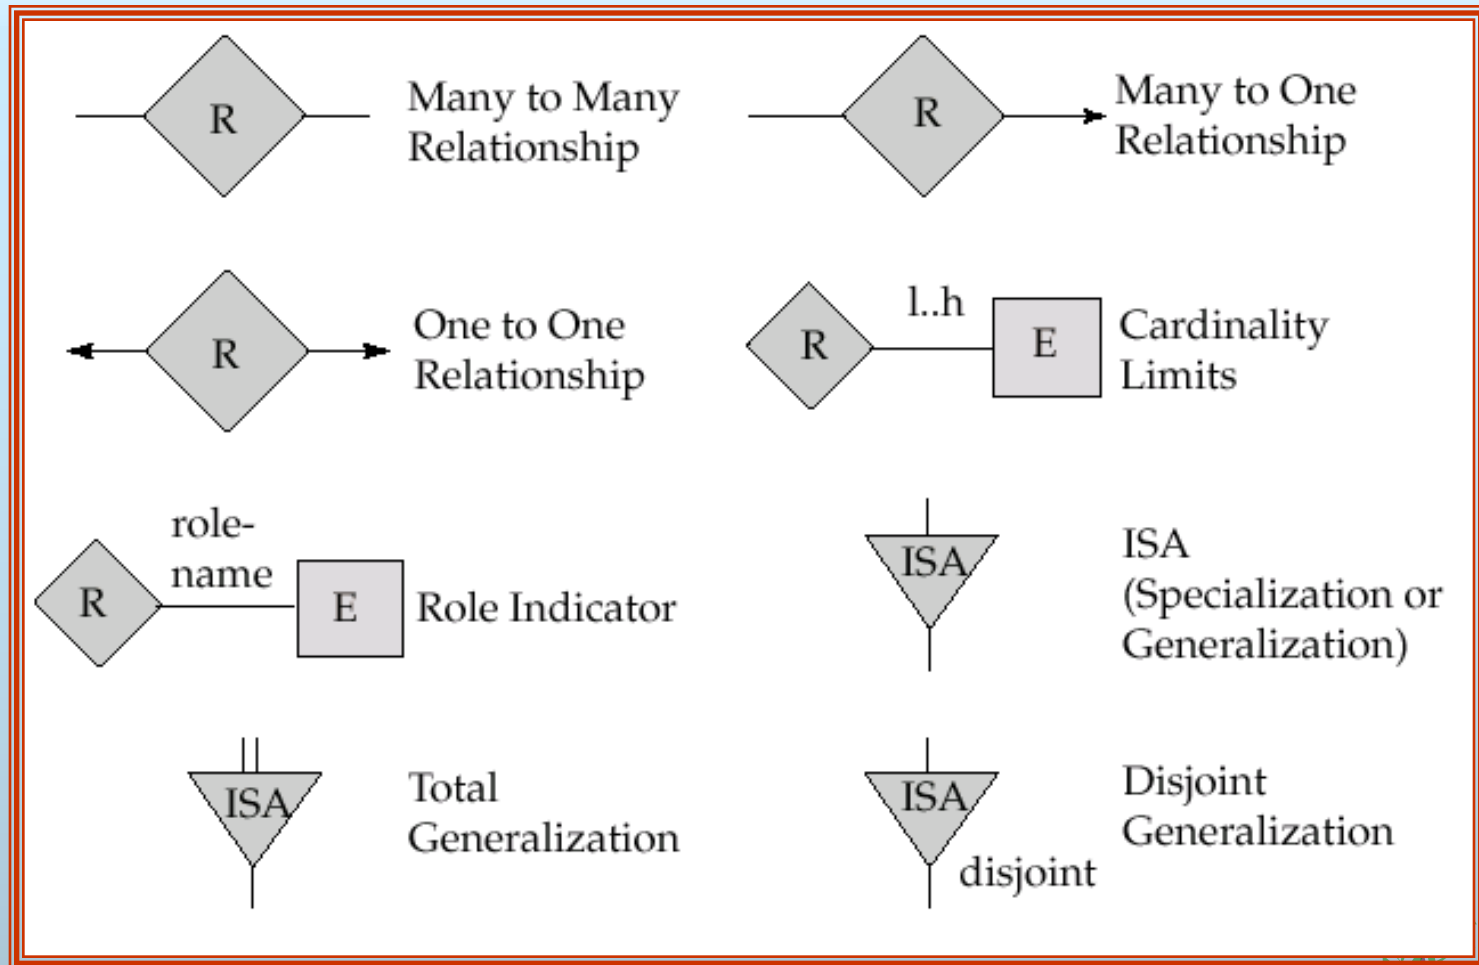


Alternative E-R Notations



Entity set E with
attributes A1, A2, A3
and primary key A1

E	
A1	
A2	
A3	




Many to Many
Relationship

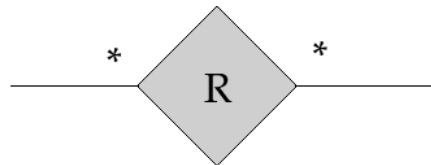

One to One
Relationship

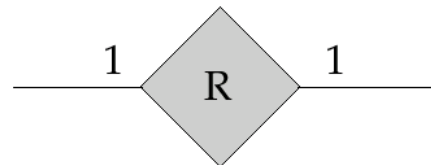


Many to One
Relationship

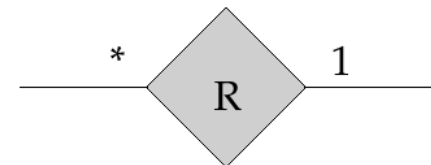





UML

- UML: Unified Modeling Language
- UML has many components to graphically model different aspects of an entire software system
- UML Class Diagrams correspond to E-R Diagram, but several differences.





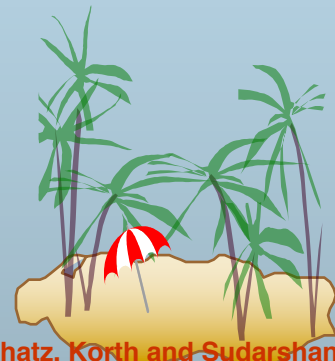


Summary of UML Class Diagram Notation

1. Entity sets and attributes

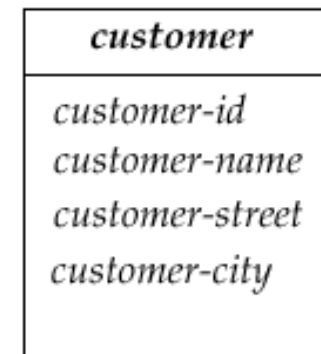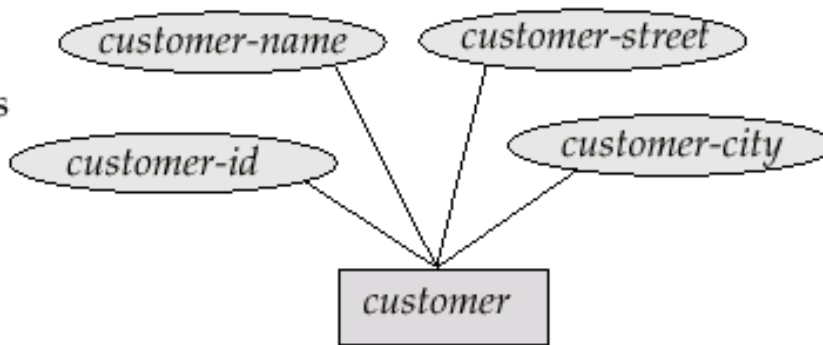


2. Relationships

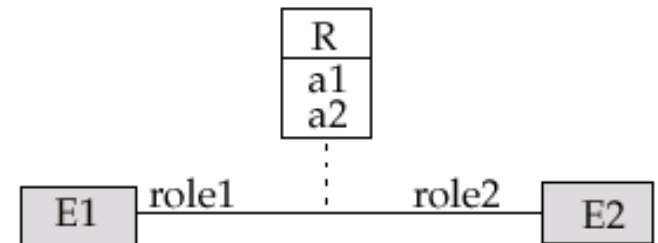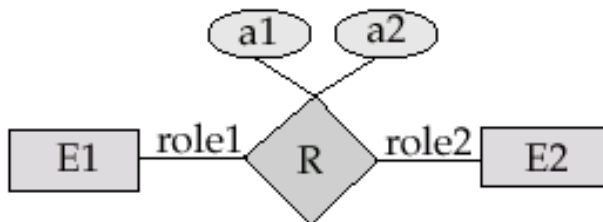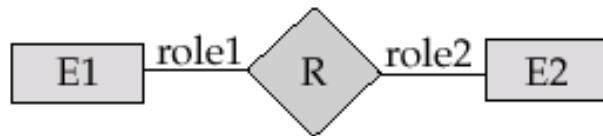



UML Class Diagrams (Contd.)


- Entity sets are shown as boxes, and attributes are shown within the box, rather than as separate ellipses in E-R diagrams.
- Binary relationship sets are represented in UML by just drawing a line connecting the entity sets. The relationship set name is written adjacent to the line.
- The role played by an entity set in a relationship set may also be specified by writing the role name on the line, adjacent to the entity set.
- The relationship set name may alternatively be written in a box, along with attributes of the relationship set, and the box is connected, using a dotted line, to the line depicting the relationship set.
- Non-binary relationships drawn using diamonds, just as in ER diagrams

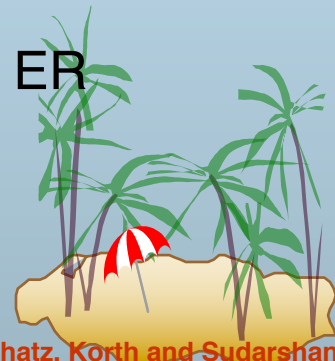







UML Class Diagram Notation (Cont.)

3. Cardinality constraints

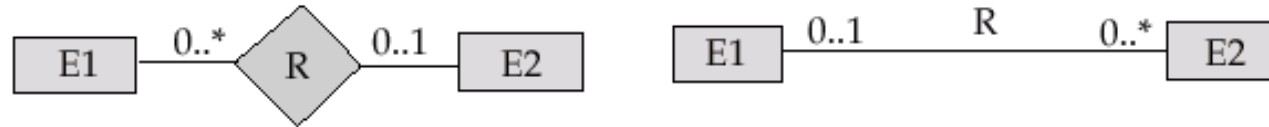

4. Generalization and Specialization

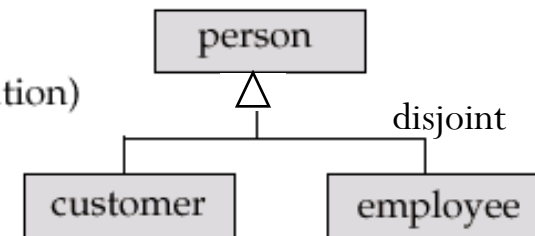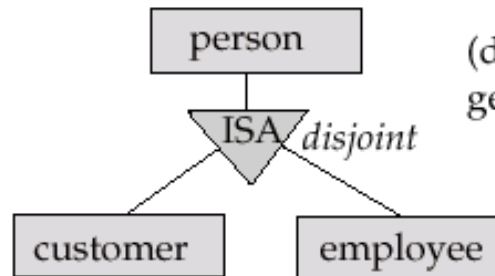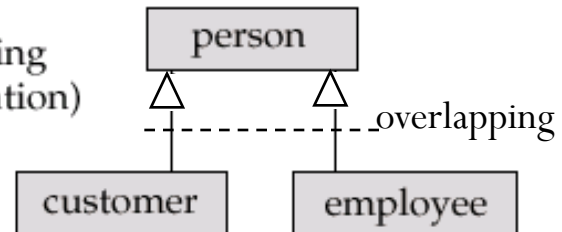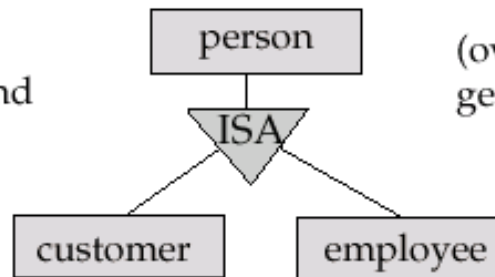

*Note reversal of position in cardinality constraint depiction


*Generalization can use merged or separate arrows independent of disjoint/overlapping





UML Class Diagrams (Contd.)


- Cardinality constraints are specified in the form $l..h$, where l denotes the minimum and h the maximum number of relationships an entity can participate in.
- Beware: the positioning of the constraints is exactly the reverse of the positioning of constraints in E-R diagrams.
- The constraint $0..*$ on the $E2$ side and $0..1$ on the $E1$ side means that each $E2$ entity can participate in at most one relationship, whereas each $E1$ entity can participate in many relationships; in other words, the relationship is many to one from $E2$ to $E1$.
- Single values, such as 1 or $*$ may be written on edges; The single value 1 on an edge is treated as equivalent to $1..1$, while $*$ is equivalent to $0..*$.

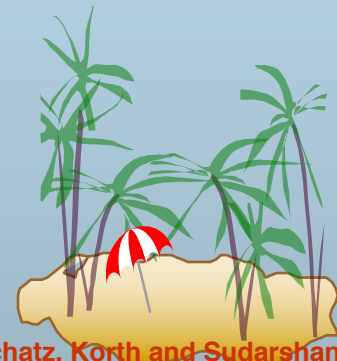



Reduction of an E-R Schema to Tables

- Primary keys allow entity sets and relationship sets to be expressed uniformly as *tables* which represent the contents of the database.
- A database which conforms to an E-R diagram can be represented by a collection of tables.
- For each entity set and relationship set there is a unique table which is assigned the name of the corresponding entity set or relationship set.
- Each table has a number of columns (generally corresponding to attributes), which have unique names.
- Converting an E-R diagram to a table format is the basis for deriving a relational database design from an E-R diagram.

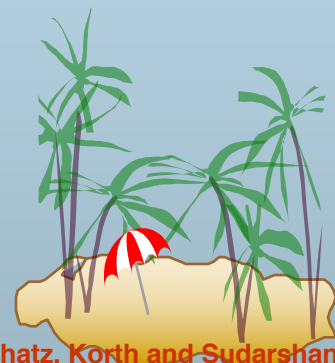



Representing Entity Sets as Tables

- A strong entity set reduces to a table with the same attributes.

<i>customer-id</i>	<i>customer-name</i>	<i>customer-street</i>	<i>customer-city</i>
019-28-3746	Smith	North	Rye
182-73-6091	Turner	Putnam	Stamford
192-83-7465	Johnson	Alma	Palo Alto
244-66-8800	Curry	North	Rye
321-12-3123	Jones	Main	Harrison
335-57-7991	Adams	Spring	Pittsfield
336-66-9999	Lindsay	Park	Pittsfield
677-89-9011	Hayes	Main	Harrison
963-96-3963	Williams	Nassau	Princeton





Composite and Multivalued Attributes

- Composite attributes are flattened out by creating a separate attribute for each component attribute
 - ★ E.g. given entity set *customer* with composite attribute *name* with component attributes *first-name* and *last-name* the table corresponding to the entity set has two attributes
name.first-name and *name.last-name*
- A multivalued attribute M of an entity E is represented by a separate table EM
 - ★ Table EM has attributes corresponding to the primary key of E and an attribute corresponding to multivalued attribute M
 - ★ E.g. Multivalued attribute *dependent-names* of *employee* is represented by a table
employee-dependent-names(employee-id, dname)
 - ★ Each value of the multivalued attribute maps to a separate row of the table EM
 - ✓ E.g., an employee entity with primary key John and dependents Johnson and Johndotir maps to two rows:
(John, Johnson) and (John, Johndotir)





Representing Weak Entity Sets

- A weak entity set becomes a table that includes a column for the primary key of the identifying strong entity set

<i>loan-number</i>	<i>payment-number</i>	<i>payment-date</i>	<i>payment-amount</i>
L-11	53	7 June 2001	125
L-14	69	28 May 2001	500
L-15	22	23 May 2001	300
L-16	58	18 June 2001	135
L-17	5	10 May 2001	50
L-17	6	7 June 2001	50
L-17	7	17 June 2001	100
L-23	11	17 May 2001	75
L-93	103	3 June 2001	900
L-93	104	13 June 2001	200





Representing Relationship Sets as Tables

- A many-to-many relationship set is represented as a table with columns for the primary keys of the two participating entity sets, and any descriptive attributes of the relationship set.
- E.g.: table for relationship set *borrower*



<i>customer-id</i>	<i>loan-number</i>
019-28-3746	L-11
019-28-3746	L-23
244-66-8800	L-93
321-12-3123	L-17
335-57-7991	L-16
555-55-5555	L-14
677-89-9011	L-15
963-96-3963	L-17





Redundancy of Tables


- Many-to-one and one-to-many relationship sets that are total on the many-side can be represented by adding an extra attribute to the many side, containing the primary key of the one side
- E.g.: Instead of creating a table for relationship *account-branch*, add an attribute *branch* to the entity set *account*

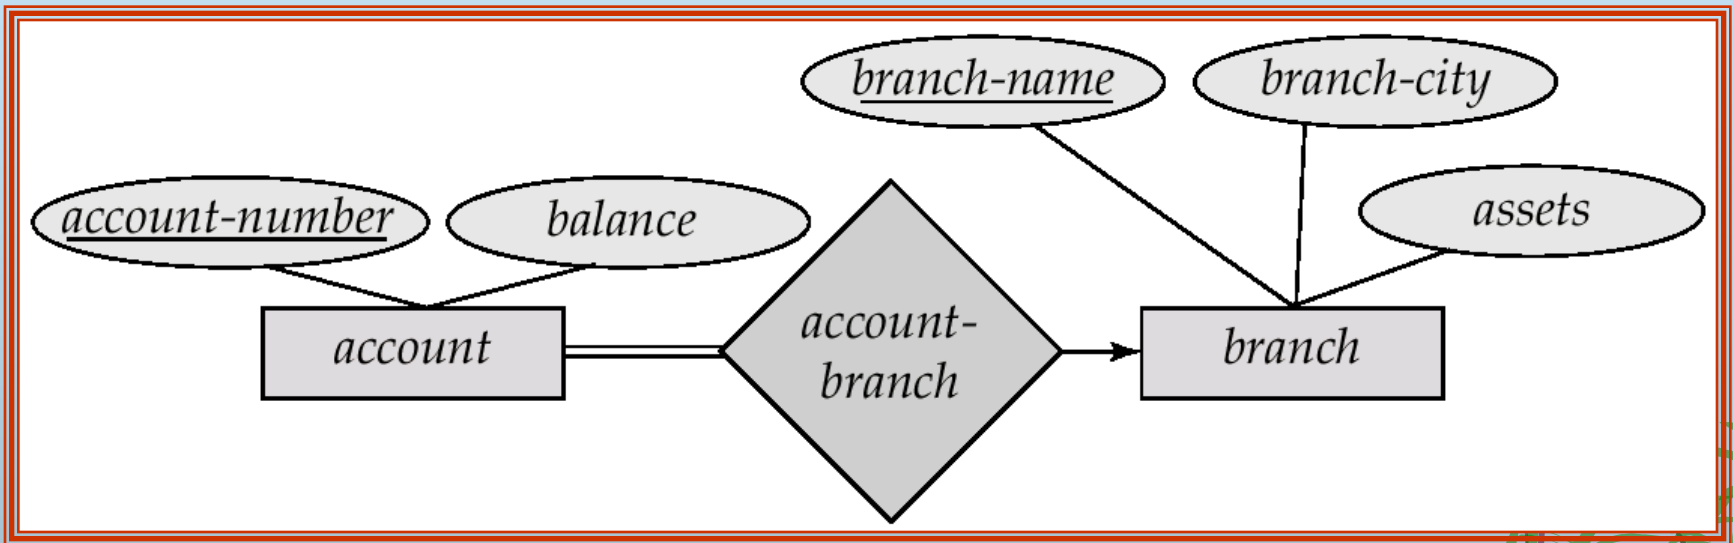



Redundancy of Tables (Cont.)

- For one-to-one relationship sets, either side can be chosen to act as the “many” side
 - ★ That is, extra attribute can be added to either of the tables corresponding to the two entity sets
- If participation is *partial* on the many side, replacing a table by an extra attribute in the relation corresponding to the “many” side could result in null values
- The table corresponding to a relationship set linking a weak entity set to its identifying strong entity set is redundant.
 - ★ E.g. The *payment* table already contains the information that would appear in the *loan-payment* table (i.e., the columns *loan-number* and *payment-number*).

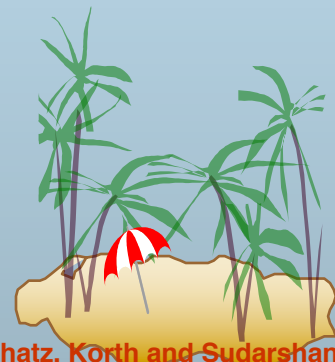



Representing Specialization as Tables

■ Method 1:

- ★ Form a table for the higher level entity
- ★ Form a table for each lower level entity set, include primary key of higher level entity set and local attributes

table	table attributes
<i>person</i>	<i>name, street, city</i>
<i>customer</i>	<i>name, credit-rating</i>
<i>employee</i>	<i>name, salary</i>

- ★ Drawback: getting information about, e.g., *employee* requires accessing two tables





Representing Specialization as Tables (Cont.)

■ Method 2:

- ★ Form a table for each entity set with all local and inherited attributes

table	table attributes
<i>person</i>	<i>name, street, city</i>
<i>customer</i>	<i>name, street, city, credit-rating</i>
<i>employee</i>	<i>name, street, city, salary</i>

- ★ If specialization is total, table for generalized entity (*person*) not required to store information
 - ✓ Can be defined as a “view” relation containing union of specialization tables
 - ✓ But explicit table may still be needed for foreign key constraints
- ★ Drawback: street and city may be stored redundantly for persons who are both customers and employees





Relations Corresponding to Aggregation


- To represent aggregation, create a table containing
 - primary key of the aggregated relationship,
 - the primary key of the associated entity set
 - Any descriptive attributes






Relations Corresponding to Aggregation (Cont.)

- E.g., to represent aggregation *manages* between relationship *works-on* and entity set *manager*, create a table *manages*(*employee-id*, *branch-name*, *title*, *manager-name*)
- Table *works-on* is redundant **provided** we are willing to store null values for attribute *manager-name* in table *manages*

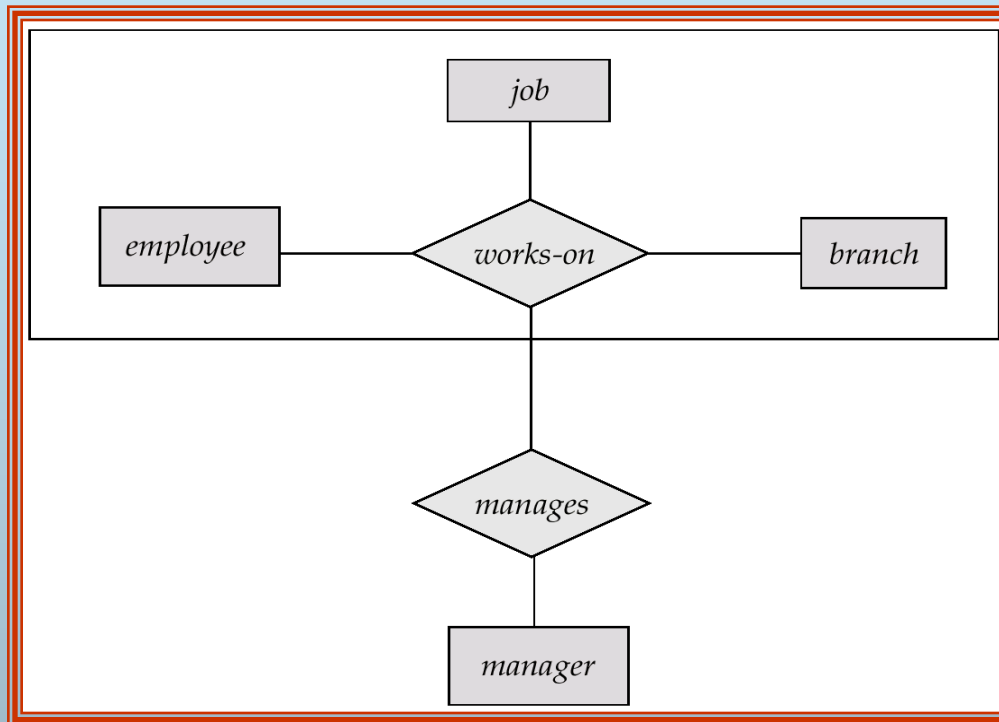

 The picture can't be displayed.

End of Chapter 2

