

# CS54701: Information Retrieval

*Probabilistic Retrieval Models*

28 January 2016

Prof. Chris Clifton



## Summary: Vector Space Retrieval

- Represent the query as a weighted tf-idf vector
- Represent each document as a weighted tf-idf vector
- Compute the cosine similarity score for the query vector and each document vector
- Rank documents with respect to the query by score
- Return the top  $K$  (e.g.,  $K = 10$ ) to the user




# tf-idf weighting has many variants

Term frequency		Document frequency		Normalization	
n (natural)	$tf_{t,d}$	n (no)	1	n (none)	1
l (logarithm)	$1 + \log(tf_{t,d})$	t (idf)	$\log \frac{N}{df_t}$	c (cosine)	$\frac{1}{\sqrt{w_1^2 + w_2^2 + \dots + w_M^2}}$
a (augmented)	$0.5 + \frac{0.5 \times tf_{t,d}}{\max_t(tf_{t,d})}$	p (prob idf)	$\max\{0, \log \frac{N-df_t}{df_t}\}$	u (pivoted unique)	$1/u$
b (boolean)	$\begin{cases} 1 & \text{if } tf_{t,d} > 0 \\ 0 & \text{otherwise} \end{cases}$			b (byte size)	$1/CharLength^\alpha$ , $\alpha < 1$
L (log ave)	$\frac{1 + \log(tf_{t,d})}{1 + \log(\text{ave}_{e \in d}(tf_{t,d}))}$				

3



# Why probabilities in IR?

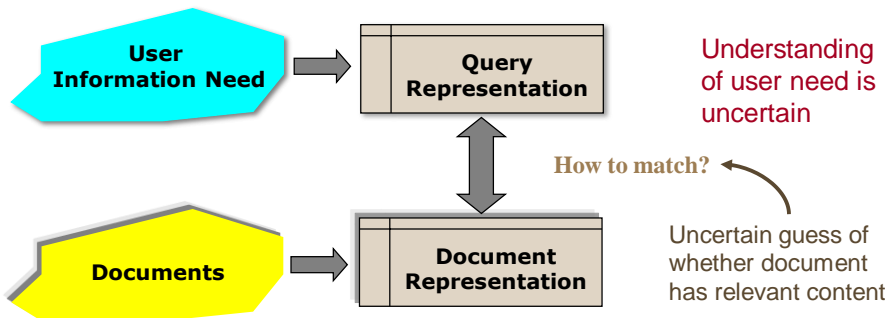

In traditional IR systems, matching between each document and query is attempted in a semantically imprecise space of index terms.

Probabilities provide a principled foundation for uncertain reasoning.  
*Can we use probabilities to quantify our uncertainties?*

4



## Probabilistic IR topics

- Classical probabilistic retrieval model
  - Probability ranking principle, etc.
  - Binary independence model ( $\approx$  Naïve Bayes)
  - (Okapi) BM25
- Bayesian networks for text retrieval
- Language model approach to IR
  - An important emphasis in recent work
- *Probabilistic methods are one of the oldest but also one of the currently hottest topics in IR.*
  - *Traditionally: neat ideas, but didn't win on performance*
  - *It may be different now.*

5



## The document ranking problem

- We have a collection of documents
- User issues a query
- A list of documents needs to be returned
- **Ranking method is the core of an IR system:**
  - **In what order do we present documents to the user?**
  - We want the “best” document to be first, second best second, etc....
- **Idea: Rank by probability of relevance of the document w.r.t. information need**
  - $P(R=1|\text{document}_i, \text{query})$

6



## Recall a few probability basics

- For events A and B:
- Bayes' Rule

$$p(A, B) = p(A \cap B) = p(A | B)p(B) = p(B | A)p(A)$$

$$p(A | B) = \frac{p(B | A)p(A)}{p(B)} = \frac{p(B | A)p(A)}{\sum_{X=A, \bar{A}} p(B | X)p(X)}$$

← Prior

← Posterior

- Odds:

$$O(A) = \frac{p(A)}{p(\bar{A})} = \frac{p(A)}{1 - p(A)}$$

7



## The Probability Ranking Principle (PRP)

“If a reference retrieval system’s response to each request is a ranking of the documents in the collection in order of decreasing probability of relevance to the user who submitted the request, where the probabilities are estimated as accurately as possible on the basis of whatever data have been made available to the system for this purpose, the overall effectiveness of the system to its user will be the best that is obtainable on the basis of those data.”

- [1960s/1970s] S. Robertson, W.S. Cooper, M.E. Maron; van Rijsbergen (1979:113); Manning & Schütze (1999:538)

8



## Probability Ranking Principle (PRP)

Let  $x$  represent a document in the collection.  
Let  $R$  represent **relevance** of a document w.r.t. given (fixed) query and let **R=1** represent relevant and **R=0** not relevant.

Need to find  $p(R=1/x)$  - probability that a document  $x$  is **relevant**.

$$p(R = 1 | x) = \frac{p(x | R = 1)p(R = 1)}{p(x)}$$

$p(R=1), p(R=0)$  - prior probability of retrieving a relevant or non-relevant document

$$p(R = 0 | x) = \frac{p(x | R = 0)p(R = 0)}{p(x)}$$

$p(x/R=1), p(x/R=0)$  - probability that if a relevant (not relevant) document is retrieved, it is  $x$ .

$$p(R = 0 | x) + p(R = 1 | x) = 1$$

9



## Probability Ranking Principle (PRP)

- Simple case: no selection costs or other utility concerns that would differentially weight errors
- PRP in action: Rank all documents by  $p(R=1/x)$
- Theorem: Using the PRP is optimal, in that it minimizes the loss (Bayes risk) under 1/0 loss
  - Provable if all probabilities correct, etc. [e.g., Ripley 1996]

10



## Probability Ranking Principle (PRP)

- More complex case: retrieval costs.
  - Let  $d$  be a document
  - $C$  – cost of not retrieving a relevant document
  - $C'$  – cost of retrieving a non-relevant document
- Probability Ranking Principle: if  $C \times p(R=0|d) - C \times p(R=1|d) \leq C \times p(R=0|d') - C \times p(R=1|d')$  for all  $d'$  not yet retrieved, then  $d$  is the next document to be retrieved
- **We won't further consider cost/utility from now on**

11



## Probability Ranking Principle (PRP)

- How do we compute all those probabilities?
  - Do not know exact probabilities, have to use estimates
  - Binary Independence Model (BIM) – which we discuss next – is the simplest model
- Questionable assumptions
  - “Relevance” of each document is independent of relevance of other documents.
    - Really, it's bad to keep on returning **duplicates**
  - Boolean model of relevance
  - That one has a single step information need
    - Seeing a range of results might let user refine query

12



## Probabilistic Retrieval Strategy

- Estimate how terms contribute to relevance
  - How do things like  $tf$ ,  $df$ , and document length influence your judgments about document relevance?
    - A more nuanced answer is the Okapi BM25 formula
      - Spärck Jones / Robertson
- Combine to find document relevance probability
- Order documents by decreasing probability

13



## Probabilistic Ranking

### Basic concept:

“For a given query, if we know some documents that are relevant, terms that occur in those documents should be given greater weighting in searching for other relevant documents.

By making assumptions about the distribution of terms and applying Bayes Theorem, it is possible to derive weights theoretically.”

*Van Rijsbergen*

14



## Binary Independence Model

- Traditionally used in conjunction with PRP
- “**Binary**” = **Boolean**: documents are represented as binary incidence vectors of terms (cf. IIR Chapter 1):
  - $\vec{x} = (x_1, \dots, x_n)$
  - $x_i = 1$  iff term  $i$  is present in document  $x$ .
- “**Independence**”: terms occur in documents independently
- Different documents can be modeled as the same vector

15



## Binary Independence Model

- Queries: binary term incidence vectors
- Given query  $q$ ,
  - for each document  $d$  need to compute  $p(R|q,d)$ .
  - replace with computing  $p(R|q,x)$  where  $x$  is binary term incidence vector representing  $d$ .
  - Interested only in ranking
- Will use odds and Bayes’ Rule:

$$O(R|q, \vec{x}) = \frac{p(R=1|q, \vec{x})}{p(R=0|q, \vec{x})} = \frac{\frac{p(R=1|q)p(\vec{x}|R=1,q)}{p(\vec{x}|q)}}{\frac{p(R=0|q)p(\vec{x}|R=0,q)}{p(\vec{x}|q)}}$$

16





# Binary Independence Model

$$O(R | q, \vec{x}) = \frac{p(R = 1 | q, \vec{x})}{p(R = 0 | q, \vec{x})} = \frac{p(R = 1 | q)}{p(R = 0 | q)} \times \frac{p(\vec{x} | R = 1, q)}{p(\vec{x} | R = 0, q)}$$

Constant for a given query

Needs estimation

- Using **Independence Assumption**:

$$\frac{p(\vec{x} | R = 1, q)}{p(\vec{x} | R = 0, q)} = \prod_{i=1}^n \frac{p(x_i | R = 1, q)}{p(x_i | R = 0, q)}$$

$$O(R | q, \vec{x}) = O(R | q) \times \prod_{i=1}^n \frac{p(x_i | R = 1, q)}{p(x_i | R = 0, q)}$$

17



# Binary Independence Model

$$O(R | q, \vec{x}) = O(R | q) \times \prod_{i=1}^n \frac{p(x_i | R = 1, q)}{p(x_i | R = 0, q)}$$

- Since  $x_i$  is either 0 or 1:

$$O(R | q, \vec{x}) = O(R | q) \times \prod_{x_i=1} \frac{p(x_i = 1 | R = 1, q)}{p(x_i = 1 | R = 0, q)} \times \prod_{x_i=0} \frac{p(x_i = 0 | R = 1, q)}{p(x_i = 0 | R = 0, q)}$$

- Let  $p_i = p(x_i = 1 | R = 1, q)$ ;  $r_i = p(x_i = 1 | R = 0, q)$ ;

- Assume, for all terms not occurring in the query ( $q_i=0$ )  $p_i = r_i$

$$O(R | q, \vec{x}) = O(R | q) \times \prod_{\substack{x_i=1 \\ q_i=1}} \frac{p_i}{r_i} \times \prod_{\substack{x_i=0 \\ q_i=1}} \frac{(1 - p_i)}{(1 - r_i)}$$

18



# Model Parameters

	document	relevant (R=1)	not relevant (R=0)
term present	$x_i = 1$	$p_i$	$r_i$
term absent	$x_i = 0$	$(1 - p_i)$	$(1 - r_i)$

19



# Binary Independence Model

$$O(R | q, \vec{x}) = O(R | q) \times \prod_{x_i=q_i=1} \frac{p_i}{r_i} \times \prod_{x_i=0, q_i=1} \frac{1-p_i}{1-r_i}$$

All matching terms

Non-matching query terms

$$O(R | q, \vec{x}) = O(R | q) \times \prod_{\substack{x_i=1 \\ q_i=1}} \frac{p_i}{r_i} \times \prod_{\substack{x_i=1 \\ q_i=1}} \frac{1-r_i}{1-p_i} \times \prod_{\substack{x_i=0 \\ q_i=1}} \frac{1-p_i}{1-r_i}$$

$$O(R | q, \vec{x}) = O(R | q) \times \prod_{x_i=q_i=1} \frac{p_i(1-r_i)}{r_i(1-p_i)} \times \prod_{q_i=1} \frac{1-p_i}{1-r_i}$$

All matching terms

All query terms



# Binary Independence Model

$$O(R | q, \vec{x}) = O(R | q) \cdot \prod_{x_i=q_i=1} \frac{p_i(1-r_i)}{r_i(1-p_i)} \cdot \prod_{q_i=1} \frac{1-p_i}{1-r_i}$$

Constant for each query

Only quantity to be estimated for rankings

Retrieval Status Value:

$$RSV = \log \prod_{x_i=q_i=1} \frac{p_i(1-r_i)}{r_i(1-p_i)} = \sum_{x_i=q_i=1} \log \frac{p_i(1-r_i)}{r_i(1-p_i)}$$

21



# Binary Independence Model

All boils down to computing RSV.

$$RSV = \log \prod_{x_i=q_i=1} \frac{p_i(1-r_i)}{r_i(1-p_i)} = \sum_{x_i=q_i=1} \log \frac{p_i(1-r_i)}{r_i(1-p_i)}$$

$$RSV = \sum_{x_i=q_i=1} c_i; \quad c_i = \log \frac{p_i(1-r_i)}{r_i(1-p_i)}$$

The  $c_i$  are log odds ratios

They function as the term weights in this model

So, how do we compute  $c_i$ 's from our data ?

22



# Binary Independence Model

- Estimating RSV coefficients in theory
- For each term  $i$  look at this table of document counts:

Documents	Relevant	Non-Relevant	Total
$x_i=1$	$s$	$n-s$	$n$
$x_i=0$	$S-s$	$N-n-S+s$	$N-n$
Total	$S$	$N-S$	$N$

• Estimates:

$$p_i \approx \frac{s}{S} \quad r_i \approx \frac{(n-s)}{(N-S)}$$

$$c_i \approx K(N, n, S, s) = \log \frac{s/(S-s)}{(n-s)/(N-n-S+s)}$$

For now, assume no zero terms.

23



# Estimation – key challenge

- If non-relevant documents are approximated by the whole collection, then  $r_i$  (prob. of occurrence in non-relevant documents for query) is  $n/N$  and

$$\log \frac{1-r_i}{r_i} = \log \frac{N-n-S+s}{n-s} \gg \log \frac{N-n}{n} \gg \log \frac{N}{n} = IDF!$$

24



## Estimation – key challenge

- $p_i$  (probability of occurrence in relevant documents) cannot be approximated as easily
- $p_i$  can be estimated in various ways:
  - from relevant documents if know some
    - Relevance weighting can be used in a feedback loop
  - constant (Croft and Harper combination match) – then just get idf weighting of terms (with  $p_i=0.5$ )

$$RSV = \underset{x_i=q_i=1}{\overset{\circ}{a}} \log \frac{N}{n_i}$$

- proportional to prob. of occurrence in collection
  - Greiff (SIGIR 1998) argues for  $1/3 + 2/3 df_i/N$

25



## Probabilistic Relevance Feedback

1. Guess a preliminary probabilistic description of  $R=1$  documents and use it to retrieve a first set of documents
2. Interact with the user to refine the description: learn some definite members with  $R=1$  and  $R=0$
3. Reestimate  $p_i$  and  $r_i$  on the basis of these
  - Or can combine new information with original guess (use Bayesian prior):

$$p_i^{(2)} = \frac{|V_i| + \kappa p_i^{(1)}}{|V| + \kappa}$$

4. Repeat, thus generating a succession of approximations to relevant documents

$\kappa$  is  
prior  
weight

26



## Iteratively estimating $p_i$ and $r_i$ (= Pseudo-relevance feedback)

1. Assume that  $p_i$  is constant over all  $x_i$  in query and  $r_i$  as before
  - $p_i = 0.5$  (even odds) for any given doc
2. Determine guess of relevant document set:
  - $V$  is fixed size set of highest ranked documents on this model
3. We need to improve our guesses for  $p_i$  and  $r_i$ , so
  - Use distribution of  $x_i$  in docs in  $V$ . Let  $V_i$  be set of documents containing  $x_i$ 
    - $p_i = |V_i| / |V|$
  - Assume if not retrieved then not relevant
    - $r_i = (n_i - |V_i|) / (N - |V|)$
4. Go to 2. until converges then return ranking

27



## Okapi BM25

- Problem: BIM favors long documents
  - More likely to contain matching terms
- Solution:
  - Inter-document frequency for “relevance”
  - Scale by document length
  - Scale by query length/term frequency

28



## Okapi BM25

- BM25 metric, used in Okapi IR system
  - V=relevant documents, VNR=not relevant

$$RSV_d = \sum_{t \in q} \left[ \frac{\frac{|VR_t| + \frac{1}{2}}{|VNR_t| + \frac{1}{2}}}{df_t - |VR_t| + \frac{1}{2}} \right] \times \frac{1}{N - df_t - |VR| + |VR_t| + \frac{1}{2}}$$

Probabilistic interpretation of IDF

Term frequency with normalization by length

Query term weighting

29



## PRP and BIM

- Getting reasonable approximations of probabilities is possible.
- Requires restrictive assumptions:
  - *Term independence*
  - *Terms not in query don't affect the outcome*
  - *Boolean representation of documents/queries/relevance*
  - *Document relevance values are independent*
- Some of these assumptions can be removed
- Problem: either require partial relevance information or only can derive somewhat inferior term weights

30



## Removing term independence

- In general, index terms aren't independent
- Dependencies can be complex
- van Rijsbergen (1979) proposed model of simple tree dependencies
  - Exactly Friedman and Goldszmidt's Tree Augmented Naive Bayes (AAAI 13, 1996)
- Each term dependent on one other
- In 1970s, estimation problems held back success of this model

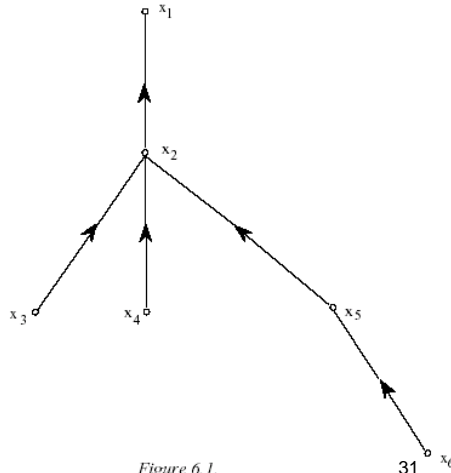


Figure 6.1.

31



## Probabilistic IR topics

- Classical probabilistic retrieval model
  - Probability ranking principle, etc.
  - Binary independence model ( $\approx$  Naïve Bayes)
  - (Okapi) BM25
- Bayesian networks for text retrieval
- Language model approach to IR
  - An important emphasis in recent work
- *Probabilistic methods are one of the oldest but also one of the currently hottest topics in IR.*
  - *Traditionally: neat ideas, but didn't win on performance*
  - *It may be different now.*

32





## And to put some faces to the names you've been seeing...



Karen Spärck Jones



Stephen Robertson



Keith van Rijsbergen

33



## Resources

- S. E. Robertson and K. Spärck Jones. 1976. Relevance Weighting of Search Terms. *Journal of the American Society for Information Sciences* 27(3): 129–146.
- C. J. van Rijsbergen. 1979. *Information Retrieval*. 2nd ed. London: Butterworths, chapter 6. [Most details of math]  
<http://www.dcs.gla.ac.uk/Keith/Preface.html>
- N. Fuhr. 1992. Probabilistic Models in Information Retrieval. *The Computer Journal*, 35(3), 243–255. [Easiest read, with BNs]
- F. Crestani, M. Lalmas, C. J. van Rijsbergen, and I. Campbell. 1998. Is This Document Relevant? ... Probably: A Survey of Probabilistic Models in Information Retrieval. *ACM Computing Surveys* 30(4): 528–552.  
<http://www.acm.org/pubs/citations/journals/surveys/1998-30-4/p528-crestani/>  
[Adds very little material that isn't in van Rijsbergen or Fuhr ]

34