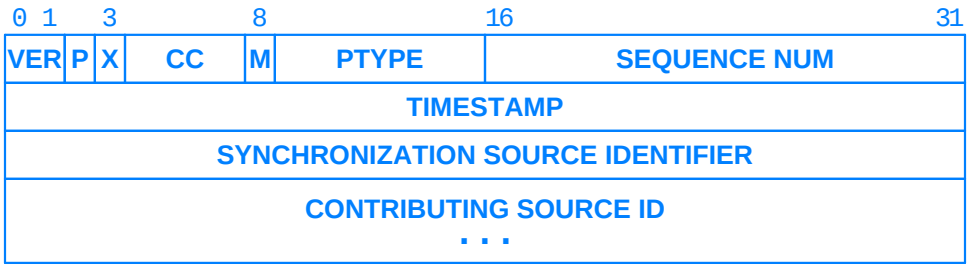

Figure 26.3 Illustration of the header used with RTP. Each message begins with this header; the exact interpretation of remaining fields in the message depends on the payload type, *PTYPE*.